

[Http://www.haitec.com.cn](http://www.haitec.com.cn)

Email: iq@haitec.com.cn



扫码关注微信公众号

2021编制

产品内容如有变动,恕不另行通知



馥融传动



OTS系列斜齿-准双曲面齿轮减速机

OTS Series Helical-Hypoid Gear Reducer



OTS系列斜齿-准双曲面齿轮减速机



广东馥融传动科技有限公司

Guangdong Haitec Transmission and Technology Co., Ltd.

地址：广东省东莞市中堂镇豫洲工业路8号融海（湛翠）工业园内5栋102

电话（Tel）：0769-88885696 020-32351758 0769-88885580

传真（Fax）：0769-88886001 020-32353079

E-mail：iq@haitec.com.cn

网址：<http://www.haitec.com.cn>

邮编（Postcode）：523226

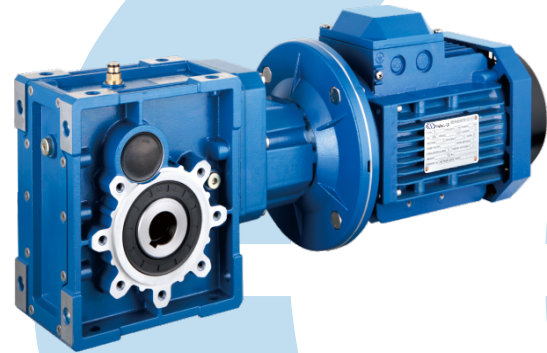
2021

广东馥融传动科技有限公司

Guangdong Haitec Transmission and Technology Co., Ltd.

Guangdong Haitec Transmission and Technology Co., Ltd. was formerly known as Haitec Transmission and Equipment Co., Ltd. It is wholly owned by legal persons from Hong Kong with a registered capital of HK\$ 8 million. It was established in Tianhe District of Guangzhou, Guangdong in December 2002 and passed ISO9001 quality management system certification. It is one of the earliest enterprises in China to introduce advanced transmission technology knowhow from Italy. It provided to customers with the best services and meet the development needs of Guangdong-Hong Kong-Macao Greater Bay Area. The headquarter was moved to ZhongTang, Dongguan City in December of 2020 which is located in the center of Guangzhou-Shenzhen Economic Corridor.

During the last 20 years, with the strong technical strength, high-quality mature products and perfect service system, the company has been rapid development. The "Haitec-GR[®]" trademark series products sold to all over the country and overseas markets such as Europe and America, and the advance specification and high quality of our products for the typical applications are agreed with the customers. We will give full play to its own advantages and adhere to the principle of "Create leading science and technology, Serve people of the market, Treat customers with integrity and pursuing product perfection. We insist the concept of "Product is the Character of the Enterprise", we have technological innovation, service innovation and management innovation in order to developing more




valuable transmission products to meet the needs of future development.

Whether in now or in the future, we will, as always, open our arms to invite first-class talents. They can embrace and join into Haitec' family to make better products, and let Haitec-GR[®] brand to serve worldwide users.

广东馥融传动科技有限公司其前身为广东欧特士传动设备有限公司，由台港澳法人独资注册，注册资本800万港币于2002年8月在广州市天河区成立，2002年12月通过ISO9001质量管理体系认证，是国内最早引进国外（意大利）先进传动机械技术的企业之一，为了更好的服务用户、适应粤港澳大湾区的发展需求，公司总部于2020年12月迁到了位于广深经济走廊中心的东莞市中堂镇。

十多年来凭借雄厚的技术实力，优质成熟的产品，完善的服务体系，使公司得到了迅猛的发展。公司著名的 Haitec-GR[®] 商标系列减速机械产品遍布全国各地及欧美等海外市场，其产品的技术指标和实际应用效果得到了用户的充分肯定和一致好评。馥融传动科技有限公司将充分发挥自身优势，秉承“科技领先、服务市场、诚信待人、追求完美”的宗旨和“产品就是人品”的企业理念，不断进行技术创新、服务创新和管理方式创新来继续研发出更多满足未来发展需求的传动机械产品。

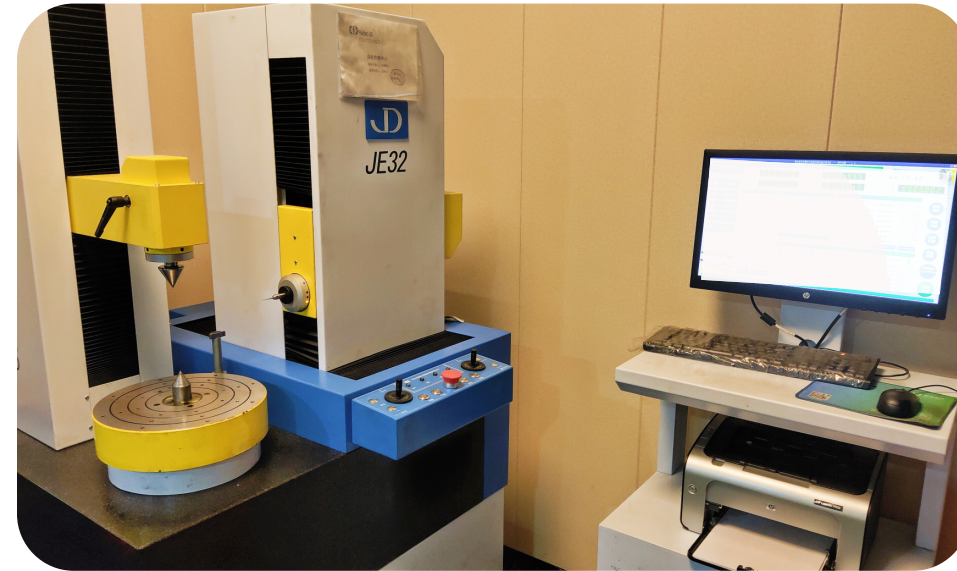不管现在还是将来，我们将一如既往的向一流的人才敞开怀抱，和我们一起融入到馥融大家庭做更好的产品，让我们和Haitec-GR[®] 品牌更好地服务用户。




专业的检测仪器

Professional
testing
equipment

精确的检测方案

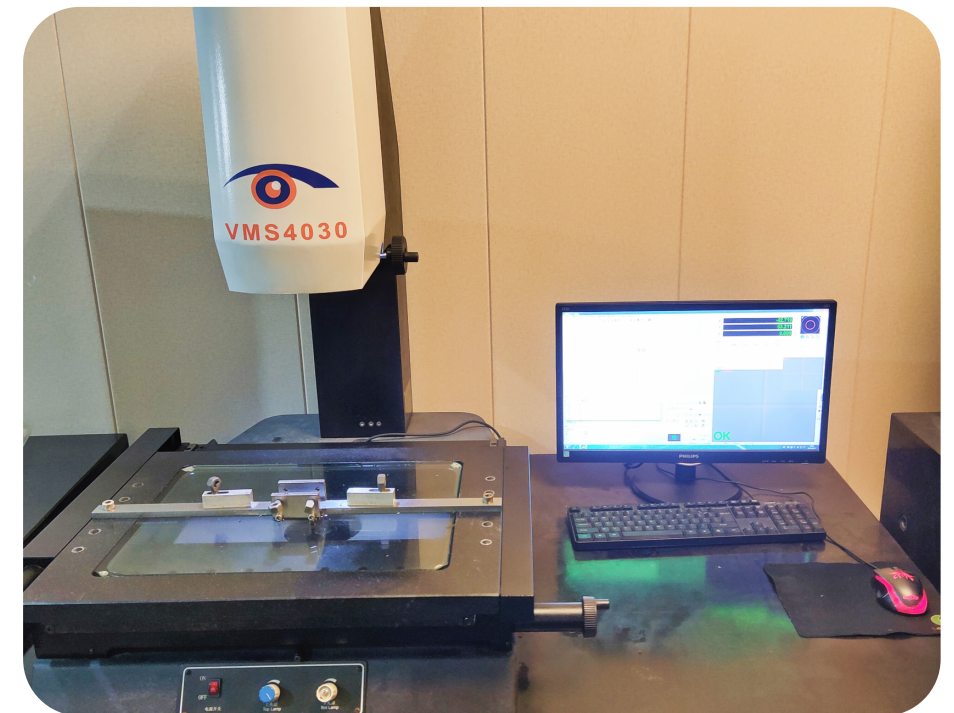Accurate
detection
scheme





专业的生产设备

Professional
production
equipment

创新先进工艺


Innovative
advanced
technology



> 高效型准双曲面齿轮减速机
OTS HIGH EFFICIENCY HYPOID GEAR UNITS

产品型式/ Type	01
结构分解图/ Structure diagram	02-03
设计特征/ Design features	04-05
型号说明/ Model illuminate	06
选型相关参数/ Relevant parameter	07-14
OTS减速机选型表/ Gear unit selection tables	15-20
OTS性能参数/ Performance parameter	21-45
OTS外形尺寸图表/ Outline dimension sheet	46-49
OTS连接尺寸图/ Connecting dimension sheet	50-53
附件尺寸图表/ Accessories outline dimension sheet	54
安装方位图/ Installation positions diagram	55-57

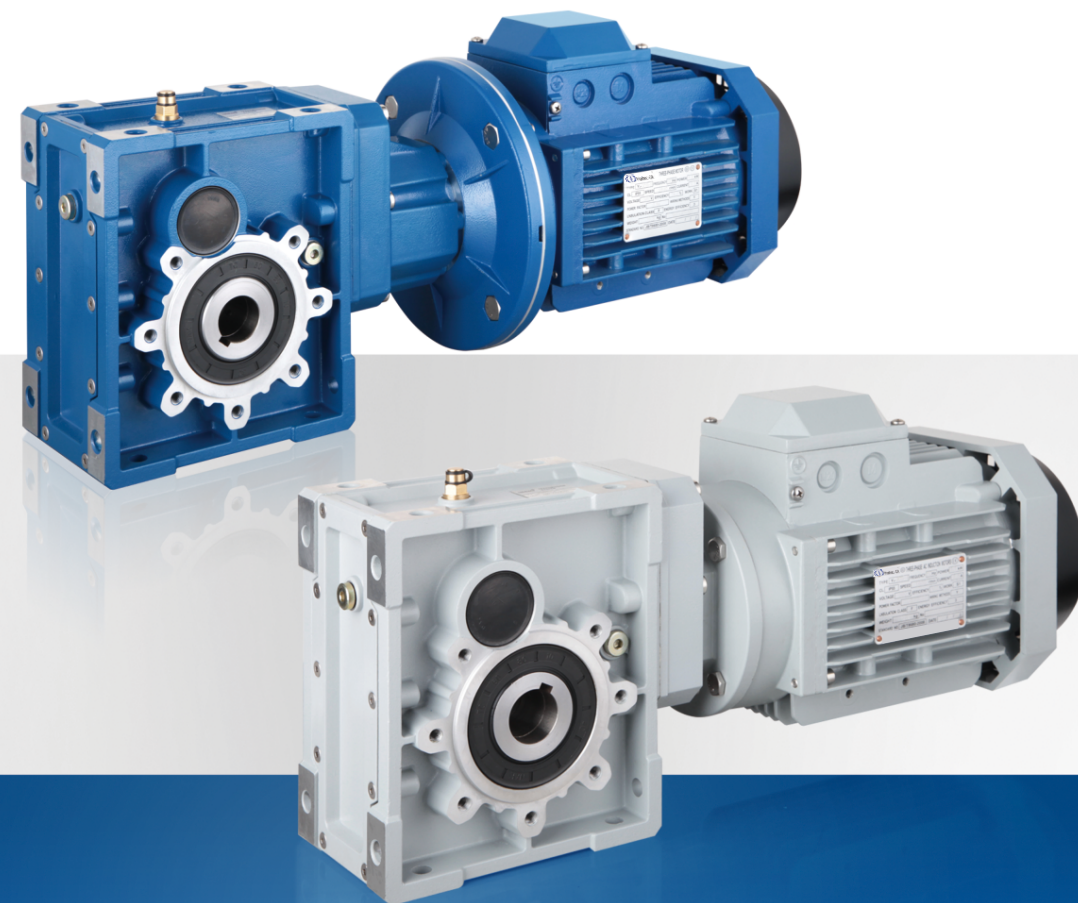
产品型式 / TYPE




高效型准双曲面齿轮减速机 HIGH EFFICIENCY HYPOID GEAR UNITS

动力传动专业制造商
PROFESSIONAL MANUFACTURER OF POWER TRANSMISSION

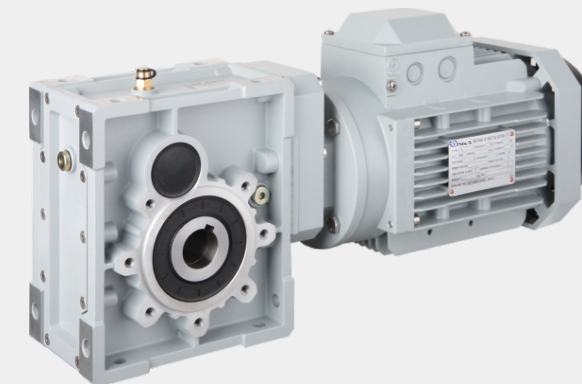
设计理念: 遵循规律，总是超越
DESIGN PHILOSOPHY: To follow the law, but always beyond.
经营理念: 为客户需求而设计，为客户满意而执着
BUSINESS PHILOSOPHY: Design for customer demand, dedication for customer satisfaction



OTS..3(MV)

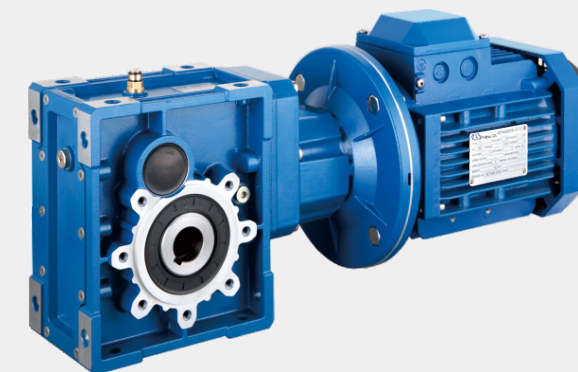


OTS..3(IEC)

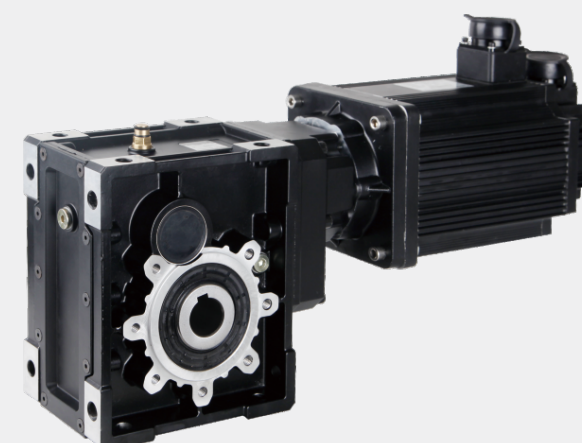

OTS..2(ST)

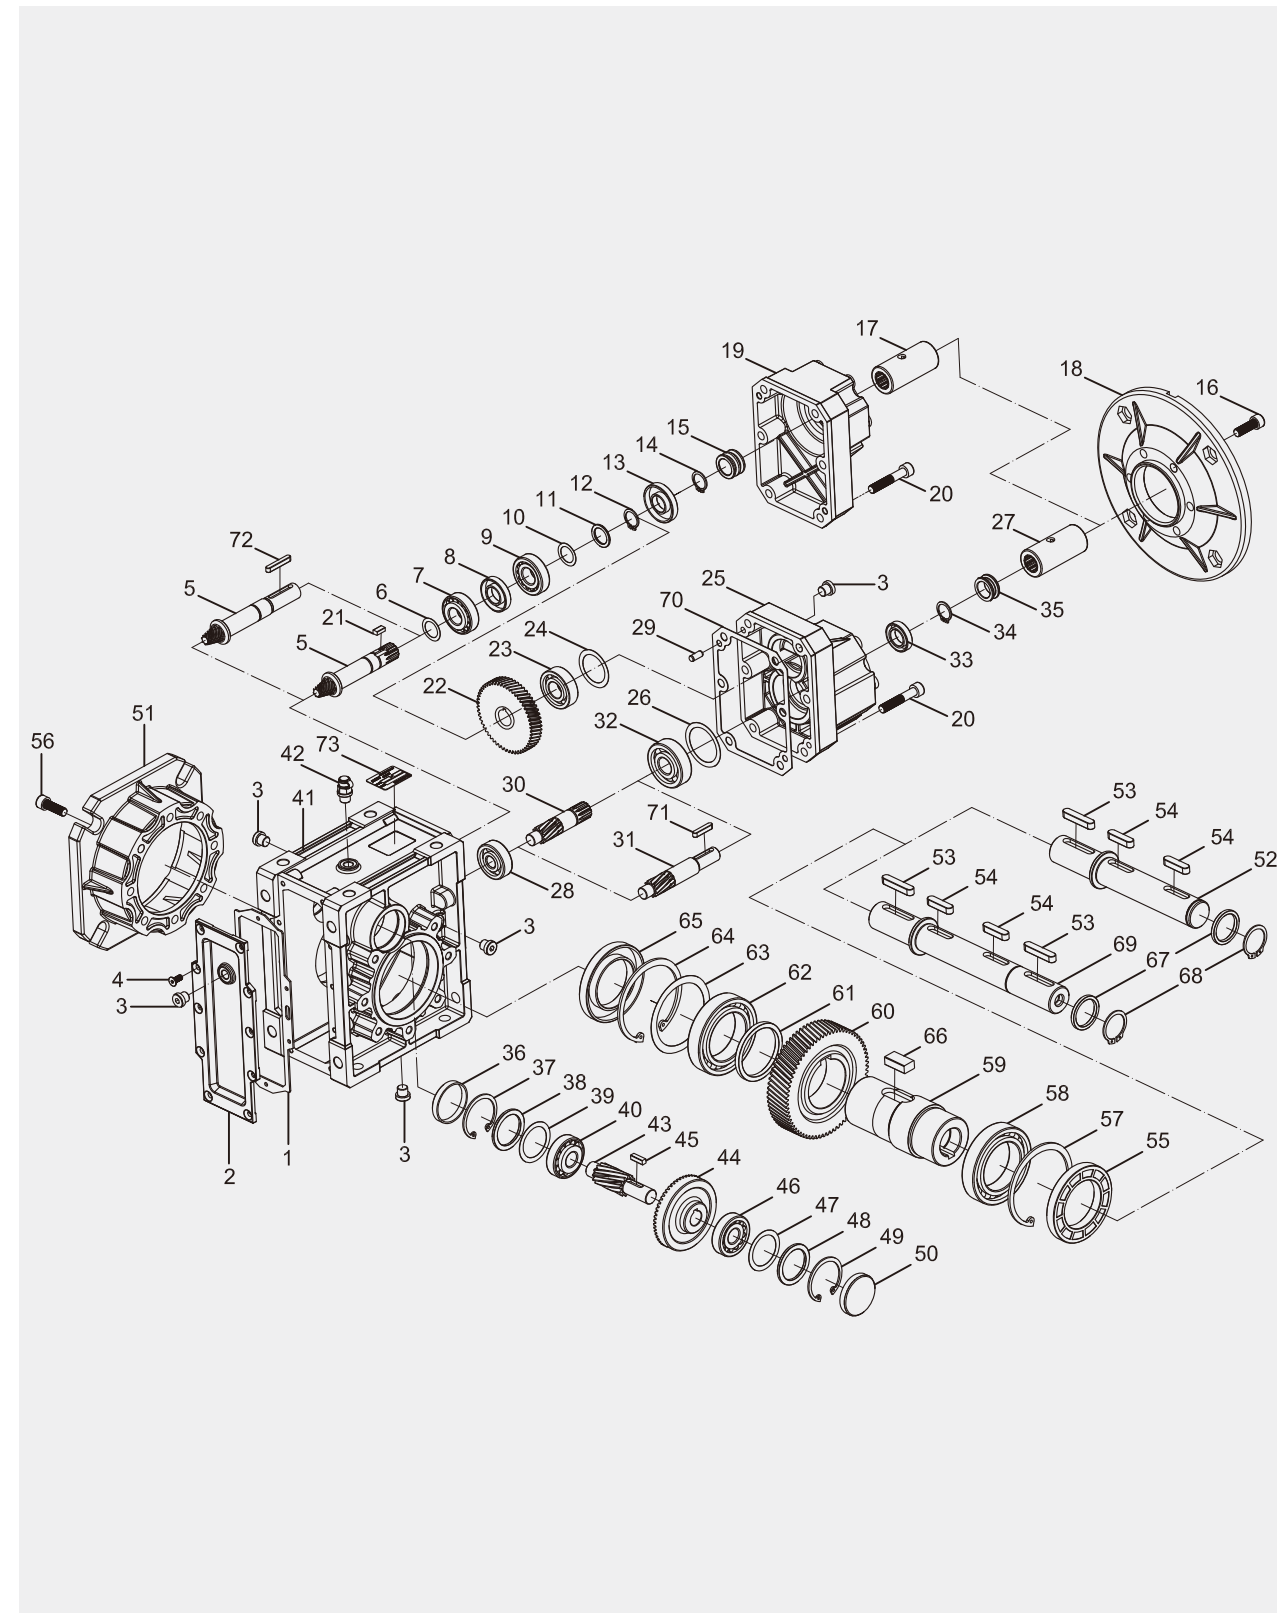结构分解图 / STRUCTURE DIAGRAM



结构分解图 / STRUCTURE DIAGRAM

1	橡胶垫 / Rubber gasket	38	垫圈 / Washer
2	齿轮箱盖板 / Gearcase cover	39	调整垫片 / Shim ring
3	油塞 / Oil plug	40	轴承 / Bearing
4	内六角沉头螺钉 / Hexagon sunk screw	41	齿轮箱体 / Gearcase
5	主动齿轮轴 / Pinion shaft	42	透气阀 / Breather valve
6	调整垫片 / Shim ring	43	主动齿轮轴 / Pinion shaft
7	轴承 / Bearing	44	从动齿轮 / Gear
8	油封 / Oil seal	45	键 / Key
9	轴承 / Bearing	46	轴承 / Bearing
10	调整垫片 / Shim ring	47	调整垫片 / Shim ring
11	垫圈 / Washer	48	垫圈 / Washer
12	轴用挡圈 / Shaft-circlip	49	孔用挡圈 / Hole-circlip
13	油封 / Oil seal	50	油封盖 / Closing cap
14	轴用挡圈 / Shaft-circlip	51	输出法兰 / Output flange
15	橡胶套 / Rubber boot	52	单向输出轴 / Single output shaft
16	内六角螺钉 / Inner hex screw	53	键 / Key
17	输入轴 / Input shaft	54	键 / Key
18	输入法兰 / Input flange	55	油封 / Oil seal
19	两级输入箱盖 / 2 stage input box cover	56	内六角螺钉 / Inner hex screw
20	内六角螺钉 / Inner hex screw	57	孔用挡圈 / Hole-circlip
21	键 / Key	58	轴承 / Bearing
22	从动齿轮 / Gear	59	输出轴 / Hollow shaft
23	轴承 / Bearing	60	从动齿轮 / Gear
24	调整垫片 / Shim ring	61	垫圈 / Washer
25	三级输入箱盖 / 3 stage input box cover	62	轴承 / Bearing
26	调整垫片 / Shim ring	63	调整垫片 / Shim ring
27	输入轴 / Input shaft	64	孔用挡圈 / Hole-circlip
28	轴承 / Bearing	65	油封 / Oil seal
29	圆柱销 / Stifte	66	键 / Key
30	主动齿轮 / Pinion	67	垫圈 / Washer
31	主动齿轮轴 / Pinion shaft	68	轴用挡圈 / Shaft-circlip
32	轴承 / Bearing	69	输出双向轴 / Double output shaft
33	油封 / Oil sea	70	密封纸垫 / Housing gasket
34	轴用挡圈 / Shaft-circlip	71	键 / Key
35	橡胶套 / Rubber boot	72	键 / Key
36	油封盖 / Closing cap	73	铭牌 / Nameplate
37	孔用挡圈 / Hole-circlip		

设计特征 / DESIGN FEATURES

产品概述 / Summarize

OTS系列高效型准双曲面齿轮减速机是我公司新一代实用性产品,融合了国内外先进技术，在保证安装尺寸与8MRV系列蜗轮蜗杆减速机兼容的前提下，通过借鉴SEW齿轮减速机结构采用全齿轮副传动，提高了传动效率，解决了当前蜗轮蜗杆减速机传动效率低，使用寿命短等问题，在工业发展中更起到了节能降耗，绿色环保的作用。

OTSseries high efficiency hypoid gearbox is a new generation of product developed by our company. Fuses the advanced technology both at home and abroad.The mounting dimension of OTS the same with 8MRV Series worm gearbox.Adpot gear transmission used for reference SEW helical gearbox structure to improve transmission efficiency,solved 8MRV worm gearbox transmission efficiency low, service life short and etc.questions. In industrial developing OTS the role of saving energy and reducing consumption,green environmental protection.

结构特点 / Products characteristics

1. 采用准双曲面齿轮传动，传动比大；

2. 输出扭矩大，传动效率高，节能环保；

3. 优质铝合金铸造，重量轻，不生锈；

4. 传动平稳，噪音小，适合在恶劣环境中长期连续工作；

5. 美观耐用，体积小；

6. 可适应全方位安装，应用广泛，使用方便；

7. OTS系列减速机安装尺寸与8MRV系列蜗轮蜗杆减速机完全兼容(OTS 050与8MRV050部分尺寸不同)；

8. 模块化组合，可多种形式组合，满足各种传动条件的需求。

1. Driven by hypoid gear , has big ratios.

2. Large in output torpue , high efficiency , energy saving and environmental protection.

3. Made of high-quqlity aluminum ally , light in weight and non-rusting.

4. Smooth in running and low in nosie , can work long time in dreadful conditions.

5. Good-looking in appearance , durable in service life and small in volume.

6. Suitable for all round installation , wide application and easy of use.

7. The mounting dimension of OTS series are compatible with 8MRV series worm gear unit(A part of 8MRV050 dimensions are different from OTS 050)

8. Modular and multi-structure can meet the demands of various conditions.

设计特征 / DESIGN FEATURES

优势对比 / Comparative advantage

1.高效节能、绿色环保 / High sfficiency &energy-saving

准双曲面齿轮的啮合摩擦小，传动效率高达90%以上，与蜗轮蜗杆减速机相比效率提高10%—40%。
The hypoid gear has low friction,efficiency is as high as 92%,compared with the worm gearbox,the efficiency improved about 10%-40%.

型号 Type	传动比 Ratios[i]	输入转速 Input speed[n1]	效率 Efficiency[η]
OTS075	30.24	1400	90%
8MRV075	30	1400	60%

2.强度高、寿命长 / High strength & long life

准双曲面齿轮采用优质合金材料，经表面硬化处理，采用高精度磨齿机加工成形，属硬齿面齿轮，输出扭矩大，齿轮强度与寿命远远高于蜗轮蜗杆减速机。
The hypoid gear made of high quality alloy, treated by surface hardening,and produced by high-precision grinding machine,the output torque gaer strength and life are much better than worm gearbox.

主要材料 / Main materials

1. 外壳：铝合金（机座：050—090）；
灰铸铁（机座：110）；

2. 齿轮：20CrMnTi，碳氮共渗，齿面硬度58—62HRC，精磨后保持渗碳层厚度0.3—0.6mm；
1. Housing:die-cast aluminum alloy (frame size:050 to 090);
grey cast iron(frame size:110);

2. Gear wheel:20CrMnTi,carbonization & nitriding treatment make the hardness of gear’s surface up to 58-62 HRC,retain carburized layer’s thickness between 0.3 and 0.6mm after accurate grinding.

表面涂装 / Surface painting

- 铝合金外壳：

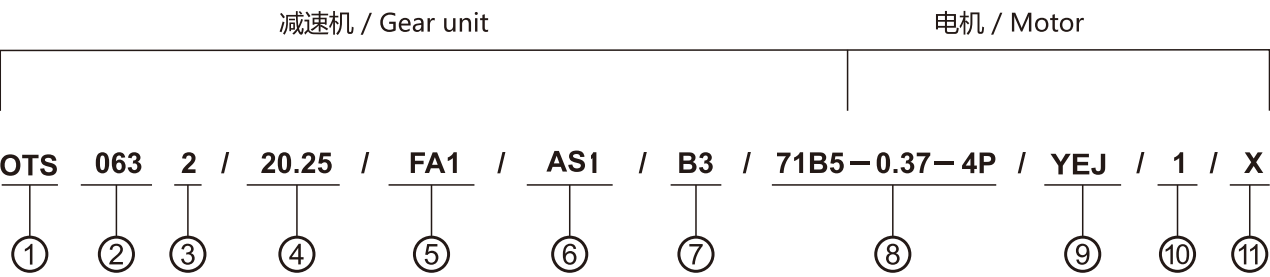
1. 先抛丸处理，再经过特种防腐处理，保持银白金属感，并耐汽油，二甲苯等有机溶剂的腐蚀；

2. 磷化处理后，再喷RAL7035银灰色涂料或RAL5010蓝色涂料。
- Aluminum alloy housing：

1. Shot blasting and special antiseptic treatment on the aluminum alloy surface.

2. After phosphating,spray the paint RAL7035 in grey or RAL5010 in blue.

型号说明 / MODEL ILLUMINATE



NO	说 明	Comments
1	减速机系列代号： OTS	Code for gear units series : OTS
2	减速机规格代号： 050、 063、 075、 090、 110	Specification code of gear units 050、 063、 075、 090、 110
3	1. 2：表示2级传动 2. 3：表示3级传动	1. 2:Means 2 stages 2. 3:Means 3 stages
4	减速机速比i	Speed ratio of reducer i
5	1.无代号表示不带输出法兰 2.FA,FB,FC,FD,FE(1/2):输出法兰代号和位置	1.No mark means without output flange 2.FA、 FB、 FC、 FD、 FE(1/2):output Flange and position
6	1.无代号表示孔输出 2.AS(1/2):单向输出轴和位置 3.AB：双向输出轴	1.No mark means hole output 2.AS(1/2):Single output shaft and position 3.AB:Double output shaft
7	安装方位代号	Installation position code
8	1.71B5： IEC输入法兰及规格代号 2.MV7124: 紧凑型电机型号规格 3.71B5-0.37-4P: IEC输入法兰和电机功率、级数 4.56C: NEMA输入法兰及规格代号 5.ST80： 伺服电机输入法兰规格代号 6.ST80-80ST-M01330:伺服电机输入法兰和伺服电机型号 7.80STM-M01330:紧凑型伺服电机型号规格 8.HS: 表示轴输入	1. 71B5:IEC input flange code 2. MV7124: Compact motor type 3. 71B5-0.37-4P: IEC input flange code and model motors(poles of power) 4. 56C: NEMA input flange code 5. ST80 : Servo motor input flange code 6. ST80-80ST-M01330: Servo motor input flange code and servo motor type 7. 80STM-M01330: Compact servo motor type 8. HS:means shaft input
9	1.无代号表示不带制动器 2.YEJ :制动器	1.No mark means without brake 2.YEJ :brake
10	电机接线盒位置，默认位置1可以不写	Position of motor terminal box default position 1 not to write out is ok
11	电机进线位置，默认位置X可以不写	Coil position for motor , default position X not to write out is ok

注：订单时请说明是否带电机，一般按不带电机供应。
NOTE: When ordering, you should show whether the reducers are equipped with motors, otherwise reducers aren’ t supplied with motors.
示例Example： OTS0633 / 63.33 / FA2 / 80B5

选型相关参数 / RELEVANT PARAMETER

功 率 P

$P_1=P_2/\eta$ (kW)
 $P_{1n} \geq P_1 \cdot fs$ (kW)

P₁ 输入功率
P_{1n} 输入电机额定功率
η 传动效率

P₂ 输出功率
fs 服务系数

OTS系列减速机的效率是根据传动级数确定，2级传动效率η为92%，3级传动效率η为90%。

POWER P

$P_1=P_2/\eta$ (kW)
 $P_{1n} \geq P_1 \cdot fs$ (kW)

P₁ Input power
P_{1n} Rated input motor power
η Transmission efficiency

P₂ Output power
fs Service factor

The efficiency of OTS gear units varies with the number of gear stages,which is 92% for 2-stage,90% for 3-stage.

转速 n / Rotation speed n

n₁ 减速机输入转速
n₂ 减速机输出转速

If driven by the external gearing, 1400r/min or lower rotation speed is suggested so as to optimize the working conditions and prolong the service life.Higher input rotation speed is permitted, but in this situation, the rated torque M₂ will be reduced.

n₁ Gear units input speed
n₂ Gear units output speed

传动比 i / Transmission ratio i

$i=n_1/n_2$

传动比通常为小数，在选型表中保留两位小数。
Usually transmission ratio is decimal fraction with 2 radix point tagged in selection tables.

扭矩 M / Torque m

$M_2=9550 \cdot P_1 \cdot \eta /n_2$ (Nm)
 $M_{2n} \geq M_2 \cdot fs$ (Nm)

M₂ 输出扭矩
M_{2n} 额定输出扭矩
P₁ 输入功率
η 传动效率
fs 服务系数

M₂ Output torque
M_{2n} Rated output torque
P₁ Input power
η Transmission efficiency
fs Service factor

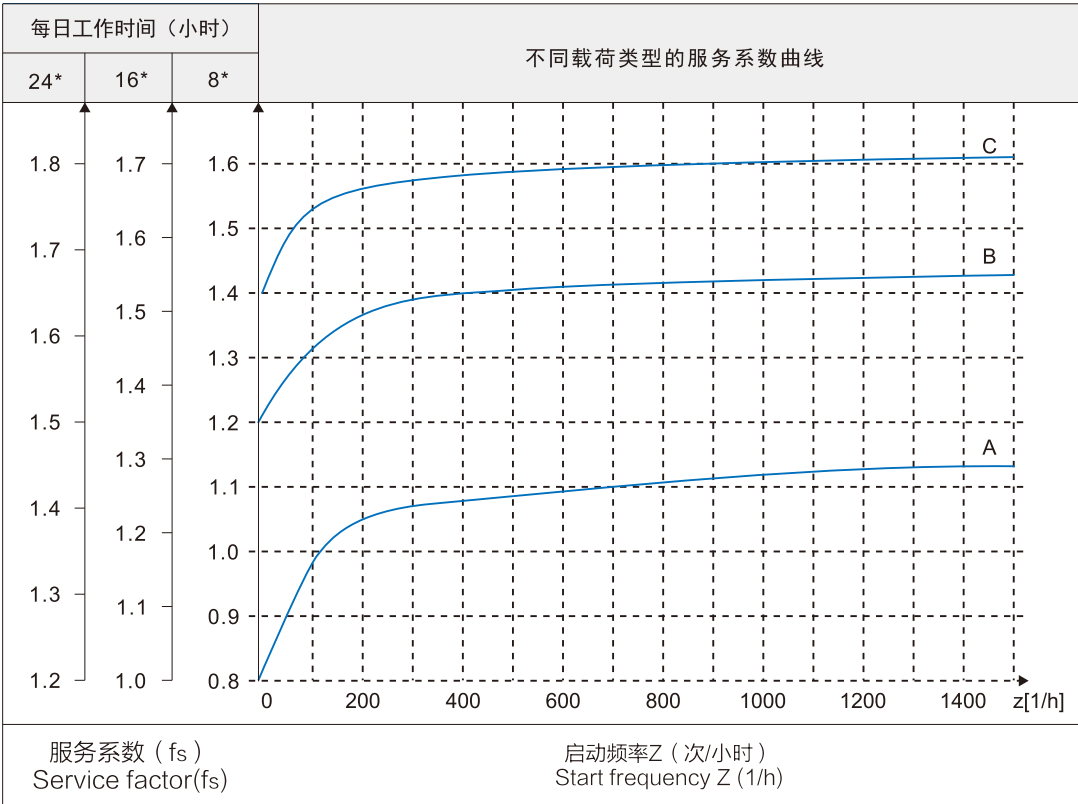
07

选型相关参数 / RELEVANT PARAMETER

服务系数 fs / Service factor fs

使用减速机时，应考虑一定的服务系数fs，它是根据每天的运转时间和启停频率Z确定的。
根据惯性加速系数确定三种负载类型，在下图中可以读取实际应用的使用系数，按下图选取的服务系数必须小于或等于从性能参数表中提供的服务系数。

The effect of the driven machine on the gear unit is taken into account to a sufficient level of accuracy using the service factor fs.The service factor is determined according to the daily operating time and the starting frequency Z.
Three load classifications are considered depending on the mass acceleration factor .You can read off the service factor applicable to your application in following figure.The service factor selected using this diagram must be less than or equal to the service factor as given in the performance parameter table.



- 启动频率Z：周期包括所有启动、制动次数以及变速电机高低速变化时的次数。
- starting frequency Z: The cycles include all starting and braking procedures as well as change overs from low to high speed.

选型相关参数 / RELEVANT PARAMETER

负载类型 / Load classifications

- 负载性质:**

 - A. 均匀冲击负载，允许惯性加速系数 $Fa \leq 0.2$
 - B. 中等冲击负载，允许惯性加速系数 $Fa \leq 3$
 - C. 重冲击负载，允许惯性加速系数 $Fa \leq 10$
- Type of load:**

 - A. Uniform ,permitted mass acceleration factor $Fa \leq 0.2$
 - B. Moderate shock load,permitted mass acceleration factor $Fa \leq 3$
 - C. Heavy shock load,permitted mass acceleration factor $Fa \leq 10$

轻负载的螺杆输送，风扇，装备线，输送带，小型搅拌器，电梯，清洗机器，过滤器，控制驱动。
卷扬机，木工机器进料器，货物起重机，平衡器，绞螺纹机器，中型搅拌器，重型输送带，绞盘，滑动闸门，刮料机，包装机械，混凝土搅拌机，行车驱动装置，铣床，齿轮泵。
大型搅拌器，剪床，压机，离心机，旋转支撑装置，重型绞盘和起重机，磨床，石材打磨机，翻斗机，钻床，冲床，凸轴压机，摺床，机床转盘，翻桶装置，震荡装置，破碎机。

Screw feeders for light materials, fans, assembly lines, conveyor belts for light materials, small mixers, lifts, cleaning machines, fillers, control machines.
Winding devices, woodworking machine feeders, goods lifts, balancers, threading machines, medium mixers, conveyor belts for heavy materials, winches, sliding doors, fertilize scrapers, packing machines, concrete mixers, crane mechanisms, milling cutters, folding machines, gear pumps.
Mixers for heavy materials, shears, presses, centrifuges, rotating supports, winches and lifts for heavy materials, grinding lathes, stone mills, bucket elevators, drilling machines, hammer mills, cam presses, folding machines, turntables, tumbling barrels, vibrators, shredders.

惯性加速系数 / Mass acceleration factor

- 惯性加速系数计算如下：

Fa=Jc/Jm

Fa惯性加速系数
Jc所有外部传动惯量（kgm²）
Jm驱动电机的传动惯量（kgm²）
如果惯性加速系数 $Fa > 10$ ，请与我们技术部联系。
- The mass acceleration factor is calculated as follows:

Fa=Jc/Jm

Fa Mass acceleration factor
Jc All external mass moments of inertia(kgm²)
Jm Mass moment of inertia on the motor end(kgm²)
If mass acceleration factors $fa > 10$,please call our Technical Service.

为了保持减速机的使用寿命，从产品样本中所选择的服务系数fs应等于或略高于计算出的服务系数fs。

To keep the service-life of gear units,use factor fs selected from the catalogue must be equal or slightly higher than the calculated use factor fs.

举例 / Example :

惯性加速系数2.5（负载类型B），运行时间14小时/天，（按16小时/天查图）和每小时200次起停，查图得服务系数 $fs = 1.48$ 。根据性能参数表所选择的使用系数 $fs \geq 1.48$

Mass acceleration factor 2.5 (load classification B) , 14hours/day operating time (read off at 16h/d) and 200 cycles/hour result in a service factor $fs = 1.48$.

choose the service factor $fs \geq 1.48$ according to the parameter sheet.

选型相关参数 / RELEVANT PARAMETER

径向载荷和轴向载荷 / Overhung loads and axial forces

在决定影响径向载荷时，安装在轴端上的传动件类型必须考虑在内。不同类型的传动对应不同的传动附加系数 f_z ，列表如下：

When determining the resulting radial loads, the type of transmission elements, mounted on the shaft end must be considered. Various transmission elements are corresponding with following transmission element factors f_z :

传动件 Transmission element	传动附加系数 f_z Transmission element factor f_z	注释 Comments
齿轮 Gears	1.15	<17齿 teeth
链轮 Chain sprockets	1.25	<20齿 teeth
	1.40	<13齿 teeth
V带轮 Narrow V-belt pulleys	1.75	有预紧力作用 Influence of the tensile force
平带轮 Flat belt pulleys	2.50	有预紧力作用 Influence of the tensile force
齿带轮 Toothed belt pulleys	2.50	有预紧力作用 Influence of the tensile force

作用在电机和齿轮轴上的径向载荷按如下公式计算：

The overhung loads exerted on the motor or gear shaft is then calculated as follows.

$$F_r = \frac{M \cdot 2000 \cdot f_z}{d_0} \text{ (N)}$$

F_r 作用在轴上的载荷[N] Resulting radial load [N]

M 作用在轴上的扭矩[Nm] Torque on the shafts [Nm]

d_0 安装在轴上传动件的平均直径[mm] Mean diameter of the mounted transmission element in [mm]

f_z 传动附加系数 Transmission element factor

许用径向载荷时根据轴承额定使用寿命 L_{10h} 来估算的（根据ISO0281）。对于特殊的运行条件，许用径向载荷时根据修正使用寿命 L_{na} 来确定。

The basis for determining the permitted radial loads is the computation of the rated service life L_{10h} of the bearings (according to ISO0281) For special operating conditions , the permitted radial loads can be determined with regard service life L_{na} .

当作用点偏离出轴中点时，许用径向载荷须按以下公式来计算，取在X点的许可数值 F_xL (根据轴承的使用寿命)

The permitted radial loads given in the selection tables must be calculated using the following formula in the event of force application not in the center of the shaft end. The smaller of the two values F_xL (according to bearing service life)

根据轴承的使用寿命公式 / according to bearing service life :

$$F_xL = F_{r(1,2)} \cdot \frac{a}{b+x} \text{ [N]}$$

F_{r1}, F_{r2} =性能参数表中的许用径向载荷 ($x=L/2$) [N]

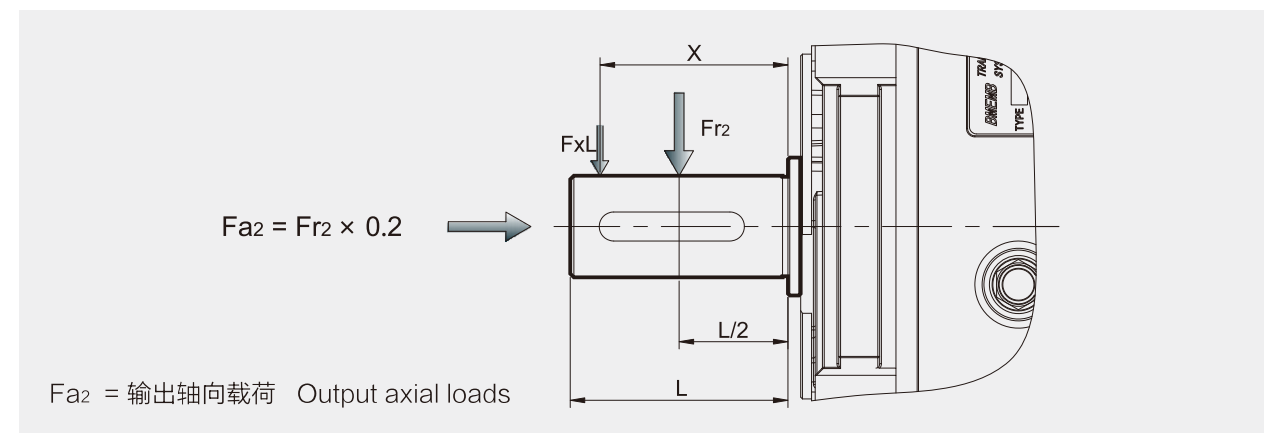
Permitted overhung load ($x=L/2$) for footmounted gear units according to he selection tables in [N]

X =从轴肩到受力点的距离[mm] Distance from the shaft shoulder to the force application point in [mm]

a, b =减速机径向转化常量[mm] Gear unit constant for overhung load conversion [mm]

选型相关参数 / RELEVANT PARAMETER


● 输出轴径向载荷 / Output shafts radial loads



OTS减速机径向转化常量 Gear unit constants for overhung load conversion:

	OTS0502	OTS0503	OTS0632	OTS0633	OTS0752	OTS0753	OTS0902	OTS0903	OTS1102	OTS1103
a	104	104	118	118	131	131	159	159	174	174
b	78	78	93	93	101	101	119	119	134	134

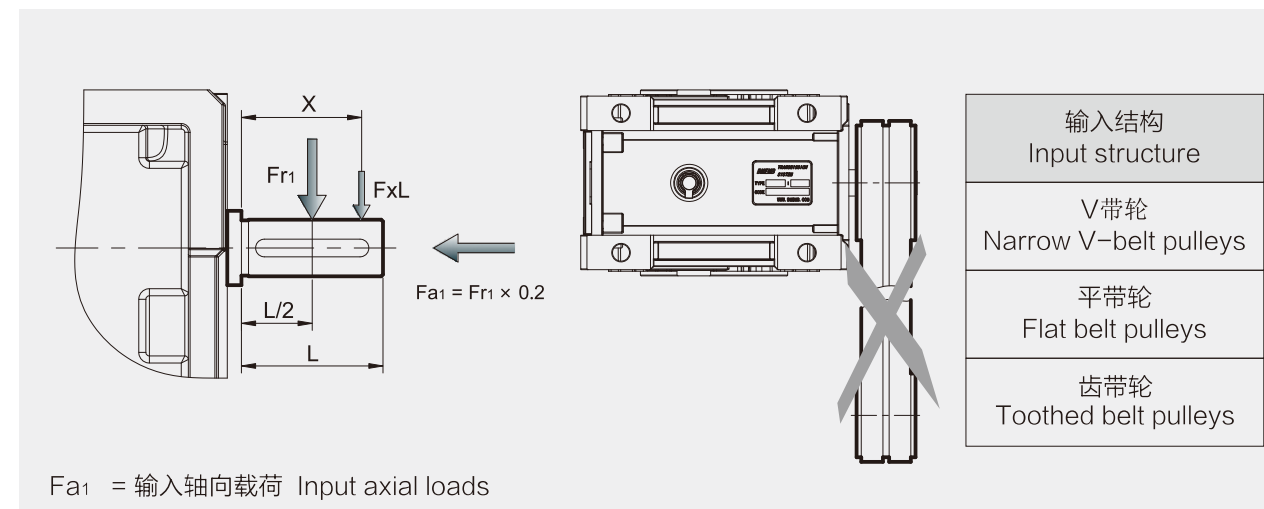● 输入轴径向载荷 / Input shafts radial loads



右示图的输入不被允许使用（包括三级输入）。

It is forbidden to use the input on the right chart (including 3 stage input) .

OTS 减速机径向转化常量 Gear unit constants for overhung load conversion:

	OTS0502	OTS0503	OTS0632	OTS0633	OTS0752	OTS0753	OTS0902	OTS0903	OTS1102	OTS1103
a	51.5	56	90	56	73	70	81	70	101	87
b	40	44.5	43	44.5	53	55	61	55	76	67

选型相关参数 / RELEVANT PARAMETER

选型表注释 / Selection tables comments

	表示电机与减速机的组合是可行的
	表示电机与减速机的组合是不可行的

*	表示速比可除尽	i_a	减速机实际传动比
P_{1n}	电机额定功率 [kW]	f_s	服务系数
n_2	输出转速 [r/min]		减速电机型号
M_{2n}	输出扭矩 [Nm]		减速机型号
M_{2max}	最大允许输出扭矩 [Nm]		电机型号
F_{r2}	输出轴径向载荷 [N]		
i	减速机公称传动比		

	Combination with the motor in the header row is possible
	Combination with the motor in the header row is not possible

*	Finite gear unit reduction ratio	i_a	Gear unit actual ratio
P_{1n}	Rated power driving motor [kW]	f_s	Service factor
n_2	Output speed [r/min]		Geared motor type
M_{2n}	Output torque`[Nm]		Gear unit type
M_{2max}	Max.permmissible output torque[Nm]		Motor type
F_{r2}	Permissible overhung load output side [N]		
i	Gear unit nominal ratio		

选型相关参数 / RELEVANT PARAMETER

选型举例 / Selection example

减速电机 / Gear motor

例：被驱动设备所需要功率0.25kW，工作8小时/天，中等冲击，启动频率100次/小时，输出转速 $n_2=35r/min$ ，减速机要求B3安装，则：

$$i = \frac{n_1}{n_2} = \frac{1400}{35} = 40$$

查P8服务系数图表即可选服务系数 $f_s=1.3$

$$P_{1n} \geq P_1 \cdot f_s = \frac{P_2}{\eta} \cdot f_s = \frac{0.25}{0.94} \times 1.3 = 0.345 \text{ (kW)}$$

查OTS 系列性能参数表可确定减速机型号为：
OTS 0502 / 40.09 / 71B5 / 0.37-4P / B3

Example : Required power 0.25kW on driven machine , work for 8 h/day , moderate shock load , start up frequency 100 (1/h) , $n_2=35r/min$, B3 mounted , So :

$$i = \frac{n_1}{n_2} = \frac{1400}{35} = 40$$

Check the service factor table on page 8 , choose $f_s=1.3$

$$P_{1n} \geq P_1 \cdot f_s = \frac{P_2}{\eta} \cdot f_s = \frac{0.25}{0.94} \times 1.3 = 0.345 \text{ (kW)}$$

Choose type:
OTS0502 / 40.09 / 71B5 / 0.37-4P / B3

减速机 / Gear units

例：被驱动设备所需扭矩为200Nm，工作8小时，均匀冲击负载，启动频率400次/小时，减速机要求FA1法兰安装，减速机要求输入转速 $n_1=900r/min$ ，输出转速 $n_2=6r/min$ ，查性能参数表可知，只选能三级传动形式。

查P8服务系数表即可选服务系数 $f_s=1$

Example:Required torque 200Nm on driven machine,work 8 h/day,uniform load,Start up frequency 400(1/h) FA1 mounted, $n_1= 900 \text{ r/min}$, $n_2= 6 \text{ r/min}$, so the only selection is 3 stage after checked the table:

check the service factor table on page 8, choose $f_s=1$

$$i = \frac{n_1}{n_2} = \frac{900}{6} = 150$$

$$M_{2n} \geq M_2 \cdot f_s = 200 \times 1.05 = 210 \text{ (Nm)}$$

$$P_{1n} \geq P_1 \cdot f_s = \frac{M_2 \cdot n_1}{9550 \cdot \eta \cdot i} \cdot f_s = \frac{210 \times 900}{9550 \times 0.92 \times 150} \times 1.05 = 0.151 \text{ (kW)}$$

查OTS 系列性能参数表可确定减速型号为：
OTS0753 / 151.20 / FA1

Choose type:
OTS0753 / 151.20 / FA1

选型相关参数 / RELEVANT PARAMETER

● 选型举例分析 / Selection example analysis

例：某大型企业新增一条生产流水线，需采购40台减速电机，要求减速机输出功率0.8kW，n1=1400r/min,均匀冲击负载，启动频率30次/小时，每天工作8小时，环境温度32℃，输出转速n2=28r/min，则：

方案一，采购传统的蜗轮减速机：

$$i = \frac{n_1}{n_2} = \frac{1400}{28} = 50$$

查看啮合参数表，估算i=50时， $\eta_d \approx 0.68$
查看调整使用系数得fs=1.05×1.12=1.176

$$P_{in} \geq \frac{P_2}{\eta_d} \cdot fs = \frac{0.8}{0.68} \times 1.176 = 1.384 \text{ (kW)}$$

输出扭矩M2计算：

$$M_2 = 9550 \times \frac{P_2}{n_2} = 9550 \times \frac{0.8}{28} = 272.86 \text{ (Nm)}$$

$$M_{2n} = 379 \geq M_2 \cdot fs = 272.86 \times 1.176 = 320.88 \text{ (Nm)}$$

查8MRV系列性能参数表可确定减速机型号为：

8MRV 110/50/1.5-4P

则生产线减速机年耗电量为（按22天/月计算）：

$$P_{in} \times 8 \times 22 \times 12 \times 40 = 1.384 \times 8 \times 22 \times 12 \times 40 = 116920.32 \text{ (kW.h)}$$

按工业用电1.01元/kW.h计算，流水线一年的电费支出为：

$$116920.32 \times 1.01 = 118089.52 \text{ 元}$$

方案二，采购 OTS高效型准双曲面齿轮减速机：

$$P_{in} \geq \frac{P_2}{\eta_d} \cdot fs = \frac{0.8}{0.94} \times 1.0 = 0.85 \text{ (kW)}$$

输出扭矩M2计算：

$$M_2 = 9550 \times \frac{P_2}{n_2} = 9550 \times \frac{0.8}{28} = 272.86 \text{ (Nm)}$$

$$M_{2n} = 340 \geq M_2 \cdot fs = 272.86 \times 1.0 = 272.86 \text{ (Nm)}$$

查OTS系列性能参数表可确定减速机型号为：

OTS 0752/48.18/90B5/90S4

则生产线减速机年耗电量为（按22天/月计算）：

$$P_{in} \times 8 \times 22 \times 12 \times 40 = 0.85 \times 8 \times 22 \times 12 \times 40 = 71808 \text{ (kW.h)}$$

按工业用电1.01元/kW.h计算，流水线一年的电费支出为：

$$71808 \times 1.01 = 72526.08 \text{ 元}$$

选择方案二可直接节省成本支出约 **4.6万元**。

Example:A certain large enterprise added a production line, need to purchase 40 units of gear motors. Required the output power is 0.8kW,n1=1400r/nin, uniform load, start up frequence 30(1/h),continuous runing for 8 hours ,the ambient temperature is 32℃,n2=28r/min. So

The first scheme, purchase traditional worm gearbox:

$$i = \frac{n_1}{n_2} = \frac{1400}{28} = 50$$

Check mash table on P69,estimate when the i=50, $\eta_d \approx 0.68$

Check and adjust the service factor, will get

$$fs = 1.05 \times 1.12 = 1.176$$

$$P_{in} \geq \frac{P_2}{\eta_d} \cdot fs = \frac{0.8}{0.68} \times 1.176 = 1.384 \text{ (kW)}$$

Count output torque:

$$M_2 = 9550 \times \frac{P_2}{n_2} = 9550 \times \frac{0.8}{28} = 272.86 \text{ (Nm)}$$

$$M_{2n} = 379 \geq M_2 \cdot fs = 272.86 \times 1.176 = 320.88 \text{ (Nm)}$$

Choose type:

8MRV110/50/1.5-4P

The power consumption on the production line is (22 days/per month):

$$P_{in} \times 8 \times 22 \times 12 \times 40 = 1.384 \times 8 \times 22 \times 12 \times 40 = 116920.32 \text{ (kW.h)}$$

The power price at 1.01yuan/kw.h, so the electric cost is 118089.52 per year

$$116920.32 \times 1.01 = 118089.52 \text{ yuan}$$

The second scheme,

purchase OTS high efficiency hypoid gear units:

$$P_{in} \geq \frac{P_2}{\eta_d} \cdot fs = \frac{0.8}{0.94} \times 1.0 = 0.85 \text{ (kW)}$$

Count output torque:

$$M_2 = 9550 \times \frac{P_2}{n_2} = 9550 \times \frac{0.8}{28} = 272.86 \text{ (Nm)}$$

$$M_{2n} = 340 \geq M_2 \cdot fs = 272.86 \times 1.0 = 272.86 \text{ (Nm)}$$

The gearbox size can be fixed from the OTS series character chart:

OTS 0752/48.18/90B5/90S4

The power consumption on the production line is (22days/per month):

$$P_{in} \times 8 \times 22 \times 12 \times 40 = 0.85 \times 8 \times 22 \times 12 \times 40 = 71808 \text{ (kW.h)}$$

The power price at 1.01yuan/kw.h, so the electric cost is 72526.08 per year

$$71808 \times 1.01 = 72526.08 \text{ yuan}$$

Choosing the second scheme can reduce the cost at **46000 yuan**.

OTS减速机选型表 / GEAR UNIT SELECTION TABLES

OTS 050..减速机组合表 (n₁ =1400r/min)

OTS 050..Possible geometrical combinations (n₁ =1400r/min)

130Nm

减速机型号 Gear units	i 公称 Nominal	i 实际 Actual	n ₂ [r/min]	M _{2max} [Nm]	F _{r2} [N]	MV63	MV71	MV80	MV90
3级/Stage									
OTS0503	300	291.79	4.8	130	4100				
OTS0503	250	244.29	5.7	130	4100				
OTS0503	200	200.44	7.0	130	4100				
OTS0503	150	146.67	9.5	130	4000				
OTS0503	125	120.34	11.6	130	3770				
OTS0503	100	101.04	13.9	100	3560				
OTS0503	75	74.62	18.8	80	3220				
OTS0503	60	62.36	22	130	3030				
OTS0503	50	52.36	27	100	2860				
2级/Stage									
OTS0502	60	58.36	24	130	2960				
OTS0502	50	48.86	29	130	2790				
OTS0502	40	40.09	35	130	2610				
OTS0502	30	29.33	48	130	2350				
OTS0502	25	24.07	58	130	2200				
OTS0502	20	20.21	69	100	2080				
OTS0502	15	14.92	94	80	1880				
OTS0502	12.5	12.47	112	130	1770				
OTS0502	10	10.47	134	100	1670				
OTS0502	7.5	7.73	181	80	1510				

OTS减速机选型表 / GEAR UNIT SELECTION TABLES

OTS 063..减速机组合表 ($n_1 = 1400\text{r/min}$)
OTS 063..Possible geometrical combinations ($n_1 = 1400\text{r/min}$)

200Nm

减速机型号 Gear units	i 公称 Nominal	i 实际 Actual	n ₂ [r/min]	M _{2max} [Nm]	F _{r2} [N]	MV63	MV71	MV80	MV90
3级/Stage									
OTS0633	300	302.50	4.6	200	4800				
OTS0633	250	243.57	5.7	200	4800				
OTS0633	200	196.43	7.1	180	4800				
OTS0633	150	151.56	9.2	200	4650				
OTS0633	125	122.22	11.5	180	4330				
OTS0633	100	101.27	13.8	150	4070				
OTS0633	75	73.33	19.1	110	3650				
OTS0633	60	63.33	22	180	3480				
OTS0633	50	52.48	27	150	3270				
2级/Stage									
OTS0632	60	60.50	23	200	3430				
OTS0632	50	48.71	29	200	3190				
OTS0632	40	39.29	36	180	2970				
OTS0632	30	30.31	46	200	2720				
OTS0632	25	24.44	57	180	2530				
OTS0632	20	20.25	69	150	2380				
OTS0632	15	14.67	95	110	2130				
OTS0632	12.5	12.67	110	180	2030				
OTS0632	10	10.50	133	150	1910				
OTS0632	7.5	7.60	184	110	1710				

OTS减速机选型表 / GEAR UNIT SELECTION TABLES

OTS 075..减速机组合表 ($n_1 = 1400\text{r/min}$)
OTS 075..Possible geometrical combinations ($n_1 = 1400\text{r/min}$)

350Nm

减速机型号 Gear units	i 公称 Nominal	i 实际 Actual	n ₂ [r/min]	M _{2max} [Nm]	F _{r2} [N]	MV63	MV71	MV80	MV90	MV100	MV112
3级/Stage											
OTS0753	300	297.21	4.7	350	6500						
OTS0753	250	240.89	5.8	350	6500						
OTS0753	200	200.66	7.0	300	6500						
OTS0753	150	151.20	9.3	350	6500						
OTS0753	125	125.95	11.1	300	5980						
OTS0753	100	99.22	14.1	240	5520						
OTS0753	75	75.45	18.6	200	5040						
OTS0753	60	62.43	22	300	4730						
OTS0753	50	49.18	28	240	4370						
2级/Stage											
OTS0752	60	59.44	24	350	4660						
OTS0752	50	48.18	29	350	4340						
OTS0752	40	40.13	35	300	4080						
OTS0752	30	30.24	46	350	3720						
OTS0752	25	25.19	56	300	3500						
OTS0752	20	19.84	71	240	3230						
OTS0752	15	15.09	93	200	2950						
OTS0752	12.5	12.49	112	300	2770						
OTS0752	10	9.84	142	240	2550						
OTS0752	7.5	7.48	187	200	2330						

OTS减速机选型表 / GEAR UNIT SELECTION TABLES

OTS 090..减速机组合表 ($n_1 = 1400\text{r/min}$)
OTS 090..Possible geometrical combinations ($n_1 = 1400\text{r/min}$)

500Nm

减速机型号 Gear units	i 公称 Nominal	i 实际 Actual	n_2 [r/min]	$M_{2\max}$ [Nm]	F_{r2} [N]	MV63	MV71	MV80	MV90	MV100	MV112
3级/Stage											
OTS0903	300	295.18	4.7	500	8300						
OTS0903	250	240.89	5.8	500	8300						
OTS0903	200	200.66	7.0	480	8300						
OTS0903	150	151.20	9.3	500	8050						
OTS0903	125	125.95	11.1	480	7580						
OTS0903	100	99.22	14.1	380	7000						
OTS0903	75	75.45	18.6	300	6390						
OTS0903	60	62.43	22	480	6000						
OTS0903	50	49.18	28	380	5540						
2级/Stage											
OTS0902	60	59.04	24	500	5890						
OTS0902	50	48.18	29	500	5500						
OTS0902	40	40.13	35	480	5170						
OTS0902	30	30.24	46	500	4710						
OTS0902	25	25.19	56	480	4430						
OTS0902	20	19.84	71	380	4090						
OTS0902	15	15.09	93	300	3730						
OTS0902	12.5	12.49	112	480	3510						
OTS0902	10	9.84	142	380	3240						
OTS0902	7.5	7.48	187	300	2950						

OTS减速机选型表 / GEAR UNIT SELECTION TABLES

OTS 110..减速机组合表 ($n_1 = 1400\text{r/min}$)
OTS 110..Possible geometrical combinations ($n_1 = 1400\text{r/min}$)

750Nm

减速机型号 Gear units	i 公称 Nominal	i 实际 Actual	n_2 [r/min]	$M_{2\max}$ [Nm]	F_{r2} [N]	MV71	MV80	MV90	MV100	MV112	MV132
3级/Stage											
OTS1103	300	296.10	4.7	750	10000						
OTS1103	250	244.29	5.7	750	10000						
OTS1103	200	206.29	6.8	750	9920						
OTS1103	150	153.33	9.1	750	8980						
OTS1103	125	129.48	10.8	750	8490						
OTS1103	100	103.64	13.5	650	7880						
OTS1103	75	75.55	18.5	520	7090						
OTS1103	60	64.18	22	750	6720						
OTS1103	50	51.37	27	650	6240						
2级/Stage											
OTS1102	60	59.22	24	750	6540						
OTS1102	50	48.86	29	750	6130						
OTS1102	40	41.26	34	750	5800						
OTS1102	30	30.67	46	750	5250						
OTS1102	25	25.90	54	750	4960						
OTS1102	20	20.73	68	650	4610						
OTS1102	15	15.11	93	520	4150						
OTS1102	12.5	12.84	109	750	3930						
OTS1102	10	10.27	136	650	3650						
OTS1102	7.5	7.49	187	520	3280						

OTS减速机选型表 / GEAR UNIT SELECTION TABLES



OTS+ST伺服减速机组合表(n₁=1500r/min)
OTS+ST Servo gear unit possible geometrical combinations(n₁=1500r/min)

OTS	ST	7.5	10	12.5	15	20	25	30	40	50	60	75	100	125	150	200	250	300
050	100W																	
	200W	●	●	●														
	400W																	
	500W																	
	750W																	
	1000W																	
	1500W																	
063	200W	●	●	●	●	●	●	●										
	400W	●	●	●														
	500W																	
	750W																	
	1000W																	
	1500W																	
075	400W	●	●	●	●	●	●	●										
	500W	●	●	●														
	750W	●	●	●														
	1000W																	
	1500W																	
	2000W																	
	3000W																	
	4000W																	
090	400W	●	●	●	●	●	●	●										
	500W	●	●	●	●	●	●											
	750W	●	●	●														
	1000W	●	●	●														
	1500W																	
	2000W																	
	3000W																	
	4000W																	
110	750W	●	●	●	●	●	●	●										
	1000W	●	●	●	●													
	1500W	●	●	●														
	2000W																	
	3000W																	
	4000W																	
	5000W																	


注：●表示允许但不推荐的配置，空格部分为不允许的配置。
NOTE : ●Means allowed but not recommended configurations,space parts means unallowed configurations.

OTS性能参数 / PERFORMANCE PARAMETER


OTS.. 性能参数 / Performance parameter

P _{1n} [kW]	n ₂ [r/min]	M _{2max} [Nm]	i	i	F _{r2} [N]	fs						
			公称 Nominal	实际 Actual								
0.12	4.8	215	300	291.79	4100	0.6	OTS 0503	MV6314	OTS 0503	63B5	6314	
	5.7	180	250	244.29	4100	0.72						
	7.0	148	200	200.44	4100	0.88						
	9.5	108	150	146.67	4000	1.2						
	11.6	89	125	120.34	3770	1.5						
	13.9	74	100	101.04	3560	1.3						
	18.8	55	75	74.62	3220	1.5						
	22	46	60	62.36	3030	2.8						
	27	39	50	52.36	2860	2.6						
	24	44	60	58.36	2960	3.0	OTS 0502	MV6314	OTS 0502	63B5	6314	
	29	37	50	48.86	2790	3.5						
	35	30	40	40.09	2610	4.3						
	48	22	30	29.33	2350	5.9						
	58	18.1	25	24.07	2200	7.2						
	69	15.2	20	20.21	2080	6.6						
	94	11.2	15	14.92	1880	7.1						
	112	9.4	12.5	12.47	1770	13.8						
	134	7.9	10	10.47	1670	12.7						
	181	5.8	7.5	7.73	1510	13.7						
	4.6	223	300	302.50	4800	0.9	OTS 0633	MV6314	OTS 0633	63B5	6314	
	5.7	179	250	243.57	4800	1.1						
	7.1	145	200	196.43	4800	1.2						
	9.2	112	150	151.56	4650	1.8						
	11.5	90	125	122.22	4330	2.0						
	13.8	75	100	101.27	4070	2.0						
	19.1	54	75	73.33	3650	2.0						
	22	47	60	63.33	3480	3.9						
	27	39	50	52.48	3270	3.9						
	23	46	60	60.50	3420	4.4	OTS 0632	MV6314	OTS 0632	63B5	6314	
	29	37	50	48.71	3190	5.5						
	36	30	40	39.29	2970	6.1						
	46	23	30	30.31	2720	8.8						
	4.7	219	300	297.21	6500	1.6	OTS 0753	MV6314	OTS 0753	63B5	6314	
	5.8	177	250	240.89	6500	2.0						
	7.0	148	200	200.66	6500	2.0						
	9.3	111	150	151.20	6500	3.1						
	11.1	93	125	125.95	5980	3.2						
	14.1	73	100	99.22	5520	3.3						
	18.6	56	75	75.45	5040	3.6						



OTS性能参数 / PERFORMANCE PARAMETER

P _{1n} [kW]	n ₂ [r/min]	M _{2max} [Nm]	i		F _{r2} [N]	fs						
			公称 Nominal	实际 Actual								
0.12	4.7	217	300	295.18	8300	2.3	OTS 0903	MV6314	OTS 0903	63B5		6314
	5.8	177	250	240.89	8300	2.8						
	7.0	148	200	200.66	8300	3.2						
	9.3	111	150	151.20	8050	4.5						
0.18	9.6	161	300	291.79	4000	0.81	OTS 0503	MV6312	OTS 0503	63B5		6312
	11.5	135	250	244.29	3790	0.96						
	14.0	111	200	200.44	3550	1.2						
	19.1	81	150	146.67	3200	1.6						
	23	66	125	120.34	2990	2.0						
	28	56	100	101.04	2820	1.8						
	38	41	75	74.62	2550	1.9						
	45	34	60	62.36	2400	3.8						
	53	29	50	52.36	2270	3.5						
	11.6	133	125	120.34	3770	0.98	OTS 0503	MV6324	OTS 0503	63B5		6324
	13.9	112	100	101.04	3560	0.9						
	18.8	82	75	74.62	3220	0.97						
	22	69	60	62.36	3030	1.9						
	27	58	50	52.36	2860	1.7						
	24	66	60	58.36	2960	2.0	OTS 0502	MV6324	OTS 0502	63B5		6324
	29	55	50	48.86	2790	2.4						
	35	45	40	40.09	2610	2.9						
	48	33	30	29.33	2350	3.9						
	58	27	25	24.07	2200	4.8						
69	23	20	20.21	2080	4.4							
94	17.2	15	14.92	1880	4.7	OTS 0503	MV7116	OTS 0503	71B5/B14		7116	
14.4	107	60	62.36	3510	1.2							
17.2	90	50	52.36	3310	1.1							
0.25	15.4	103	60	58.36	3430	1.3	OTS 0502	MV7116	OTS 0502	71B5/B14		7116
	18.4	86	50	48.86	3240	1.5						
	22	70	40	40.09	3030	1.8						
	31	52	30	29.33	2730	2.5						
	37	42	25	24.07	2550	3.1						
	45	36	20	20.21	2410	2.8						
	60	26	15	14.92	2180	3.1						
	72	22	12.5	12.47	2050	5.9						
	86	18.4	10	10.47	1930	5.4						
	116	13.6	7.5	7.73	1750	5.9						
	9.3	167	300	302.50	4650	1.2	OTS 0633	MV6312	OTS 0633	63B5		6312
	11.5	135	250	243.57	4330	1.5						
	14.3	109	200	196.43	4030	1.7						
	18.5	84	150	151.56	3690	2.4						
	23	68	125	122.22	3440	2.7						



OTS性能参数 / PERFORMANCE PARAMETER

P _{1n} [kW]	n ₂ [r/min]	M _{2max} [Nm]	i	i	F _{r2} [N]	fs						
			公称 Nominal	实际 Actual			OTS 0633	MV6312	OTS 0633	63B5	6312	
0.18	28	56	100	101.27	3230	2.7	OTS 0633	MV6312	OTS 0633	63B5	6312	
	38	41	75	73.33	2900	2.7						
	44	35	60	63.33	2760	5.1						
	53	29	50	52.48	2590	5.2						
	7.1	217	200	196.43	4800	0.83	OTS 0633	MV6324	OTS 0633	63B5	6324	
	9.2	167	150	151.56	4650	1.2						
	11.5	135	125	122.22	4330	1.3						
	13.8	112	100	101.27	4070	1.3						
	19.1	81	75	73.33	3650	1.4						
	22	70	60	63.33	3480	2.6						
	27	58	50	52.48	3270	2.6						
	23	68	60	60.50	3430	2.9	OTS 0632	MV6324	OTS 0632	63B5	6324	
	29	55	50	48.71	3190	3.6						
	36	44	40	39.29	2970	4.1						
	7.4	210	125	122.22	4800	0.86	OTS 0633	MV7116	OTS 0633	71B5/B14	7116	
	8.9	174	100	101.27	4720	0.86						
	12.3	126	75	73.33	4230	0.87						
	14.2	109	60	63.33	4030	1.7						
	17.1	90	50	52.48	3790	1.7						
	14.9	106	60	60.50	3970	1.9	OTS 0632	MV7116	OTS 0632	71B5/B14	7116	
	18.5	86	50	48.71	3690	2.3						
	23	69	40	39.29	3440	2.6						
	30	53	30	30.31	3150	3.8						
	37	43	25	24.44	2930	4.2						
	44	36	20	20.25	2760	4.2						
	61	26	15	14.67	2470	4.3						
	9.4	164	300	297.21	6320	2.1	OTS 0753	MV6312	OTS 0753	63B5	6312	
	11.6	133	250	240.89	5890	2.6						
	14.0	111	200	200.66	5540	2.7						
	18.5	84	150	151.20	5040	4.2						
	4.7	328	300	297.21	6500	1.1	OTS 0753	MV6324	OTS 0753	63B5	6324	
	5.8	266	250	240.89	6500	1.3						
	7.0	222	200	200.66	6500	1.4						
	9.3	167	150	151.20	6500	2.1						
	11.1	139	125	125.95	5980	2.2						
	14.1	110	100	99.22	5520	2.2						
	18.6	83	75	75.45	5040	2.4						
	3.7	414	250	240.89	6500	0.85	OTS 0753	MV7116	OTS 0753	71B5	7116	
	4.5	345	200	200.66	6500	0.87						
	6.0	260	150	151.20	6500	1.3						



OTS性能参数 / PERFORMANCE PARAMETER

P _{1n} [kW]	n ₂ [r/min]	M _{2max} [Nm]	i 公称 Nominal	i 实际 Actual	F _{r2} [N]	fs					
0.18	7.1	217	125	125.95	6500	1.4	OTS 0753	MV7116	OTS 0753	71B5	7116
	9.1	171	100	99.22	6400	1.4					
	11.9	130	75	75.45	5840	1.5					
	14.4	107	60	62.43	5480	2.8					
	18.3	85	50	49.18	5060	2.8					
	15.1	107	60	59.44	5390	3.4	OTS 0752	MV7116	OTS 0752	71B5	7116
	18.7	85	50	48.18	5030	4.1					
	22	71	40	40.13	4730	4.3					
	9.5	163	300	295.18	7990	3.1	OTS 0903	MV6312	OTS 0903	63B5	6312
	11.6	133	250	240.89	7470	3.8					
	14.0	111	200	200.66	7030	4.3					
	4.7	326	300	295.18	8300	1.5	OTS 0903	MV6324	OTS 0903	63B5	6324
	5.8	266	250	240.89	8300	1.9					
	7.0	222	200	200.66	8300	2.2					
	9.3	167	150	151.20	8050	3.0					
	11.1	139	125	125.95	7580	3.4					
	14.1	110	100	99.22	7000	3.5					
	18.6	83	75	75.45	6390	3.6					
	3.0	507	300	295.18	8300	1.0	OTS 0903	MV7116	OTS 0903	71B5	7116
	3.7	414	250	240.89	8300	1.2					
	4.5	345	200	200.66	8300	1.4					
	6.0	260	150	151.20	8300	1.9					
	7.1	217	125	125.95	8300	2.2					
	9.1	171	100	99.22	8110	2.2					
	11.9	130	75	75.45	7400	2.3					
	14.4	107	60	62.43	6950	4.5					
	18.3	85	50	49.18	6420	4.5					
	3.0	520	300	296.10	10000	1.5	OTS 1103	MV7116	OTS 1103	71B5	7116
	3.7	420	250	244.29	10000	1.8					
	4.4	355	200	206.29	10000	2.1					
	5.9	264	150	153.33	10000	2.8					
	7.0	223	125	129.48	9840	3.4					
	8.7	178	100	103.64	9130	3.6					
	11.9	130	75	75.55	8220	4.0					
0.25	19.1	113	150	146.67	3200	1.2	OTS 0503	MV6322	OTS 0503	63B5	6322
	23	92	125	120.34	2990	1.4					
	28	78	100	101.04	2820	1.3					
	38	57	75	74.62	2550	1.4					
	45	48	60	62.36	2400	2.7					
	53	40	50	52.36	2270	2.5					



OTS性能参数 / PERFORMANCE PARAMETER

P _{1n} [kW]	n ₂ [r/min]	M _{2max} [Nm]	i 公称 Nominal	i 实际 Actual	F _{r2} [N]	fs	 				
0.25	22	96	60	62.36	3030	1.4	OTS 0503	MV6334	OTS 0503	71B5/B14	7114
	27	80	50	52.36	2860	1.2					
	24	92	60	58.36	2960	1.4	OTS 0502	MV6334	OTS 0502	71B5/B14	7114
	29	77	50	48.86	2790	1.7					
	35	63	40	40.09	2610	2.1					
	48	46	30	29.33	2350	2.8					
	58	38	25	24.07	2200	3.4					
	69	32	20	20.21	2080	3.2					
	94	23	15	14.92	1880	3.4					
	15.4	142	60	58.36	3430	0.9	OTS 0502	MV7126	OTS 0502	71B5/B14	7126
	18.4	119	50	48.86	3240	1.1					
	22	98	40	40.09	3030	1.3					
	31	72	30	29.33	2730	1.8					
	37	59	25	24.07	2550	2.2					
	45	49	20	20.21	2410	2.0					
	60	36	15	14.92	2180	2.2					
	72	30	12.5	12.47	2050	4.3					
	86	26	10	10.47	1930	3.9					
	116	19	7.5	7.73	1750	4.2					
	9.3	232	300	302.50	4650	0.86	OTS 0633	MV6322	OTS 0633	63B5	6322
	11.5	187	250	243.57	4330	1.1					
	14.3	151	200	196.43	4030	1.2					
	18.5	116	150	151.56	3690	1.7					
	23	94	125	122.22	3440	1.9					
	28	78	100	101.27	3230	1.9					
	38	56	75	73.33	2900	2.0					
	44	49	60	63.33	2760	3.7					
	53	40	50	52.48	2590	3.7					
	9.2	233	150	151.56	4650	0.86	OTS 0633	MV6334	OTS 0633	71B5/B14	7114
	11.5	188	125	122.22	4330	0.96					
	13.8	155	100	101.27	4070	0.97					
	19.1	113	75	73.33	3650	1.0					
	22	97	60	63.33	3480	1.9					
	27	81	50	52.48	3270	1.9					
	23	95	60	60.50	3430	2.1					
	29	76	50	48.71	3190	2.6					
	36	62	40	39.29	2970	2.9					
	46	48	30	30.31	2720	4.2					
	14.2	151	60	63.33	4030	1.2	OTS 0633	MV7126	OTS 0633	71B5/B14	7126
	17.1	125	50	52.48	3790	1.2					


OTS性能参数 / PERFORMANCE PARAMETER

P _{1n} [kW]	n ₂ [r/min]	M _{2max} [Nm]	i 公称 Nominal	i 实际 Actual	F _{r2} [N]	fs						
0.25	14.9	148	60	60.50	3970	1.4	OTS 0632	MV7126	OTS 0632	71B5/B14	7126	
	18.5	119	50	48.71	3690	1.7						
	23	96	40	39.29	3440	1.9						
	30	74	30	30.31	3150	2.7						
	37	60	25	24.44	2930	3.0						
	44	49	20	20.25	2760	3.0						
	61	36	15	14.67	2470	3.1						
	9.4	228	300	297.21	6320	1.5	OTS 0753	MV6322	OTS 0753	63B5	6322	
	11.6	185	250	240.89	5890	1.9						
	14.0	154	200	200.66	5540	1.9						
	18.5	116	150	151.20	5040	3.0						
	22	97	125	125.95	4750	3.1						
	28	76	100	99.22	4380	3.2						
	37	58	75	75.45	4000	3.5						
	5.8	370	250	240.89	6500	0.95	OTS 0753	MV6334	OTS 0753	71B5	7114	
	7.0	308	200	200.66	6500	1.0						
	9.3	232	150	151.20	6500	1.5						
	11.1	193	125	125.95	5980	1.6						
	14.1	152	100	99.22	5520	1.6						
	18.6	116	75	75.45	5040	1.7						
	22	96	60	62.43	4730	3.1						
	28	75	50	49.18	4370	3.2						
	24	93	60	59.44	4660	3.8	OTS 0752	MV6334	OTS 0752	71B5	7114	
	29	76	50	48.18	4340	4.6						
	6.0	361	150	151.20	6500	0.97	OTS 0753	MV7126	OTS 0753	71B5	7126	
	7.1	301	125	125.95	6500	1.0						
	9.1	237	100	99.22	6400	1.0						
	11.9	180	75	75.45	5840	1.1						
	14.4	149	60	62.43	5480	2.0						
	18.3	117	50	49.18	5060	2.0						
	15.1	145	60	59.44	5390	2.4	OTS 0752	MV7126	OTS 0752	71B5	7126	
	18.7	118	50	48.18	5030	3.0						
	22	98	40	40.13	4730	3.1						
	9.5	227	300	295.18	7990	2.2	OTS 0903	MV6322	OTS 0903	63B5	6322	
	11.6	185	250	240.89	7470	2.7						
	14.0	154	200	200.66	7030	3.1						
	18.5	116	150	151.20	6390	4.3						
	4.7	453	300	295.18	8300	1.1	OTS 0903	MV6334	OTS 0903	71B5	7114	
	5.8	370	250	240.89	8300	1.4						
	7.0	308	200	200.66	8300	1.6						


OTS性能参数 / PERFORMANCE PARAMETER

P _{1n} [kW]	n ₂ [r/min]	M _{2max} [Nm]	i	i	F _{r2} [N]	fs						
			公称 Nominal	实际 Actual								
0.25	9.3	232	150	151.20	8050	2.2	OTS 0903	MV6334	OTS 0903	71B5	7114	
	11.1	193	125	125.95	7580	2.5						
	14.1	152	100	99.22	7000	2.5						
	18.6	116	75	75.45	6390	2.6						
	22	96	60	62.43	6000	5.0						
	28	75	50	49.18	5540	5.0						
	3.0	705	300	295.18	8300	0.71	OTS 0903	MV7126	OTS 0903	71B5	7126	
	3.7	575	250	240.89	8300	0.9						
	4.5	479	200	200.66	8300	1.0						
	6.0	361	150	151.20	8300	1.4						
	7.1	301	125	125.95	8300	1.6						
	9.1	237	100	99.22	8110	1.6						
	11.9	180	75	75.45	7400	1.7						
	14.4	149	60	62.43	6950	3.2						
	18.3	117	50	49.18	6420	3.2	OTS 0902	MV7126	OTS 0902	71B5	7126	
	15.2	144	60	59.04	6820	3.5						
	18.7	118	50	48.18	6370	4.3	OTS 1103	MV6334	OTS 1103	71B5	7114	
	4.7	454	300	296.10	10000	1.7						
	5.7	375	250	244.29	10000	2.0						
	6.8	317	200	206.29	9920	2.4						
	9.1	235	150	153.33	8980	3.2						
	10.8	199	125	129.48	8490	3.8						
	13.5	159	100	103.64	7880	4.1						
	3.0	707	300	296.10	10000	1.1	OTS 1103	MV7126	OTS 1103	71B5	7126	
	3.7	583	250	244.29	10000	1.3						
	4.4	493	200	206.29	10000	1.5						
	5.9	366	150	153.33	10000	2.0						
	7.0	309	125	129.48	9840	2.4						
	8.7	247	100	103.64	9130	2.6						
	11.9	180	75	75.55	8220	2.9						
0.37	23	137	125	120.34	2990	0.95	OTS 0503	MV6332	OTS 0503	71B5/B14	7112	
	28	115	100	101.04	2820	0.87						
	38	85	75	74.62	2550	0.94						
	45	71	60	62.36	2400	1.8						
	53	59	50	52.36	2270	1.7						
	24	136	60	58.36	2960	0.96	OTS 0502	MV7124	OTS 0502	71B5/B14	7124	
	29	113	50	48.86	2790	1.1						
	35	93	40	40.09	2610	1.4						
	48	68	30	29.33	2350	1.9						
	58	56	25	24.07	2200	2.3						




OTS性能参数 / PERFORMANCE PARAMETER

P _{1n} [kW]	n ₂ [r/min]	M _{2max} [Nm]	i 公称 Nominal	i 实际 Actual	F _{r2} [N]	fs	  			
0.37	69	47	20	20.21	2080	2.1	OTS 0502	MV7124	OTS 0502 71B5/B14	7124
	94	35	15	14.92	1880	2.3				
	112	29	12.5	12.47	1770	4.5				
	134	24	10	10.47	1670	4.1				
	181	17.9	7.5	7.73	1510	4.5				
	22	145	40	40.09	3030	0.9	OTS 0502	MV8016	OTS 0502 80B5/B14	8016
	31	106	30	29.33	2730	1.2				
	37	87	25	24.07	2550	1.5				
	45	73	20	20.21	2410	1.4				
	60	54	15	14.92	2180	1.5				
	72	45	12.5	12.47	2050	2.9				
	86	38	10	10.47	1930	2.6				
	116	28	7.5	7.73	1750	2.9				
	18.5	172	150	151.56	3690	1.2	OTS 0633	MV6332	OTS 0633 71B5/B14	7112
	23	139	125	122.22	3440	1.3				
	28	115	100	101.27	3230	1.3				
	38	83	75	73.33	2900	1.3				
	44	72	60	63.33	2760	2.5				
	53	60	50	52.48	2590	2.5				
	22	144	60	63.33	3480	1.3	OTS 0633	MV7124	OTS 0633 71B5/B14	7124
	27	119	50	52.48	3270	1.3				
	23	140	60	60.50	3430	1.4	OTS 0632	MV7124	OTS 0632 71B5/B14	7124
	29	113	50	48.71	3190	1.8				
	36	91	40	39.29	2970	2.0				
	46	70	30	30.31	2720	2.8				
	57	57	25	24.44	2530	3.2				
	69	47	20	20.25	2380	3.2				
	95	34	15	14.67	2130	3.2				
	14.9	219	60	60.50	3970	0.92				
	18.5	176	50	48.71	3690	1.1	OTS 0632	MV8016	OTS 0632 80B5/B14	8016
	23	142	40	39.29	3440	1.3				
	30	109	30	30.31	3150	1.8				
	37	88	25	24.44	2930	2.0				
	44	73	20	20.25	2760	2.1				
	61	53	15	14.67	2470	2.1				
	71	46	12.5	12.67	2360	3.9				
	86	38	10	10.50	2210	4.0				
	118	27	7.5	7.60	1990	4.0				
	9.4	338	300	297.21	6320	1.0				
	11.6	274	250	240.89	5890	1.3				



OTS性能参数 / PERFORMANCE PARAMETER

P _{1n} [kW]	n ₂ [r/min]	M _{2max} [Nm]	i	i	F _{r2} [N]	fs					
			公称 Nominal	实际 Actual							
0.37	14.0	228	200	200.66	5540	1.3	OTS 0753	MV6332	OTS 0753	71B5	7112
	18.5	172	150	151.20	5040	2.0					
	22	143	125	125.95	4750	2.1					
	28	113	100	99.22	4380	2.1					
	37	86	75	75.45	4000	2.3					
	45	71	60	62.43	3750	4.2					
	57	56	50	49.18	3470	4.3					
	9.3	343	150	151.20	6500	1.0	OTS 0753	MV7124	OTS 0753	71B5	7124
	11.1	286	125	125.95	5980	1.0					
	14.1	225	100	99.22	5520	1.1					
	18.6	171	75	75.45	5040	1.2					
	22	142	60	62.43	4730	2.1					
	28	112	50	49.18	4370	2.1					
	24	138	60	59.44	4660	2.5	OTS 0752	MV7124	OTS 0752	71B5	7124
	29	112	50	48.18	4340	3.1					
	35	93	40	40.13	4080	3.2					
	14.4	221	60	62.43	5480	1.4	OTS 0753	MV8016	OTS 0753	80B5/B14	8016
	18.3	174	50	49.18	5060	1.4					
	15.1	215	60	59.44	5390	1.6	OTS 0752	MV8016	OTS 0752	80B5/B14	8016
	18.7	174	50	48.18	5030	2.0					
	22	145	40	40.13	4730	2.1					
	30	109	30	30.24	4310	3.2					
	36	91	25	25.19	4050	3.3					
	45	72	20	19.84	3740	3.3					
	60	55	15	15.09	3410	3.7					
	9.5	335	300	295.18	7990	1.5					
	11.6	274	250	240.89	7470	1.8					
	14.0	228	200	200.66	7030	2.1					
	18.5	172	150	151.20	6390	2.9					
	22	143	125	125.95	6010	3.4					
	28	113	100	99.22	5550	3.4					
	37	86	75	75.45	5070	3.5					
	4.7	671	300	295.18	8300	0.75	OTS 0903	MV7124	OTS 0903	71B5	7124
	5.8	547	250	240.89	8300	0.91					
	7.0	456	200	200.66	8300	1.1					
	9.3	343	150	151.20	8050	1.5					
	11.1	286	125	125.95	7580	1.7					
	14.1	225	100	99.22	7000	1.7					
	18.6	171	75	75.45	6390	1.8					
	22	142	60	62.43	6000	3.4					


OTS性能参数 / PERFORMANCE PARAMETER

	P _{1n}	n ₂	M _{2max}	i	i	F _{r2}	fs	  				
	[kW]	[r/min]	[Nm]	公称 Nominal	实际 Actual	[N]						
0.37		28	112	50	49.18	5540	3.4	OTS 0903	MV7124	OTS 0903	71B5	7124
		24	137	60	59.04	5890	3.6	OTS 0902	MV7124	OTS 0902	71B5	7124
		29	112	50	48.18	5500	4.5					
		6.0	534	150	151.20	8300	0.94	OTS 0903	MV8016	OTS 0903	80B5/B14	8016
		7.1	445	125	125.95	8300	1.1					
		9.1	351	100	99.22	8110	1.1					
		11.9	267	75	75.45	7400	1.1					
		14.4	221	60	62.43	6950	2.2					
		18.3	174	50	49.18	6420	2.2					
		15.2	213	60	59.04	6820	2.3	OTS 0902	MV8016	OTS 0902	80B5/B14	8016
		18.7	174	50	48.18	6370	2.9					
		22	145	40	40.13	6000	3.3					
		9.5	336	300	296.10	8880	2.2	OTS 1103	MV6332	OTS 1103	71B5	7112
		11.5	277	250	244.29	8330	2.7					
		13.6	234	200	206.29	7870	3.2					
		18.3	174	150	153.33	7130	4.3					
		4.7	673	300	296.10	10000	1.1	OTS 1103	MV7124	OTS 1103	71B5	7124
		5.7	555	250	244.29	10000	1.4					
		6.8	469	200	206.29	9920	1.6					
		9.1	348	150	153.33	8980	2.2					
		10.8	294	125	129.48	8490	2.5					
		13.5	235	100	103.64	7880	2.8					
		18.5	172	75	75.55	7090	3.0					
		4.4	729	200	206.29	10000	1.0	OTS 1103	MV8016	OTS 1103	80B5	8016
		5.9	542	150	153.33	10000	1.4					
		7.0	458	125	129.48	9840	1.6					
		8.7	366	100	103.64	9130	1.8					
		11.9	267	75	75.55	8220	1.9					
		14.0	227	60	64.18	7780	3.3					
		17.5	182	50	51.37	7230	3.6					
		15.2	214	60	59.22	7580	3.5	OTS 1102	MV8016	OTS 1102	80B5	8016
		18.4	176	50	48.86	7110	4.2					
0.55		45	105	60	62.36	2400	1.2	OTS 0503	MV7122	OTS 0503	71B5/B14	7122
		53	88	50	52.36	2270	1.1					
		35	138	40	40.09	2610	0.94	OTS 0502	MV8014	OTS 0502	80B5/B14	8014
		48	101	30	29.33	2350	1.3					
		58	83	25	24.07	2200	1.6					
		69	70	20	20.21	2080	1.4					
		94	51	15	14.92	1880	1.6					
		112	43	12.5	12.47	1770	3.0					

OTS性能参数 / PERFORMANCE PARAMETER

	P _{1n}	n ₂	M _{2max}	i	i	F _{r2}	fs	  				
	[kW]	[r/min]	[Nm]	公称 Nominal	实际 Actual	[N]						
0.55		134	36	10	10.47	1670	2.8	OTS 0502	MV8014	OTS 0502	80B5/B14	8014
		181	27	7.5	7.73	1510	3.0					
		37	129	25	24.07	2550	1.0	OTS 0502	MV8026	OTS 0502	80B5/B14	8026
		45	109	20	20.21	2410	0.92					
		60	80	15	14.92	2180	1.0					
		72	67	12.5	12.47	2050	1.9					
		86	56	10	10.47	1930	1.8					
		116	42	7.5	7.73	1750	1.9					
		23	206	125	122.22	3440	0.87	OTS 0633	MV7122	OTS 0633	71B5/B14	7122
		28	171	100	101.27	3230	0.88					
		38	124	75	73.33	2900	0.9					
		44	107	60	63.33	2760	1.7					
		53	89	50	52.48	2590	1.7					
		23	209	60	60.50	3430	0.96	OTS 0632	MV8014	OTS 0632	80B5/B14	8014
		29	168	50	48.71	3190	1.2					
		36	136	40	39.29	2970	1.3					
		46	105	30	30.31	2720	1.9					
		57	84	25	24.44	2530	2.1					
		69	70	20	20.25	2380	2.1					
		95	51	15	14.67	2130	2.2					
		110	44	12.5	12.67	2030	4.1					
		133	36	10	10.50	1910	4.1	OTS 0632	MV8026	OTS 0632	80B5/B14	8026
		184	26	7.5	7.60	1710	4.2					
		23	216	40	39.29	3440	0.85					
		30	163	30	30.31	3150	1.2					
		37	131	25	24.44	2930	1.4					
		44	109	20	20.25	2760	1.4					
		61	79	15	14.67	2470	4.4					
		71	68	12.54	12.67	2360	2.6					
		86	56	10	10.50	2210	2.7	OTS 0753	MV7122	OTS 0753	71B5	7122
		118	41	7.5	7.60	1990	2.7					
		11.6	407	250	240.89	5890	0.86					
		14.0	339	200	200.66	5540	0.9					
		18.5	255	150	151.20	5040	1.4					
		22	213	125	125.95	4750	1.4					
		28	168	100	99.22	4380	1.4					
		37	127	75	75.45	4000	1.6					
		45	105	60	62.43	3750	2.8	OTS 0753	MV8014	OTS 0753	80B5/B14	8014
		57	83	50	49.18	3470	2.9					
		18.6	255	75	75.45	5040	0.8					


OTS性能参数 / PERFORMANCE PARAMETER

	P _{1n}	n ₂	M _{2max}	i	i	F _{r2}	fs					
	[kW]	[r/min]	[Nm]	公称 Nominal	实际 Actual	[N]						
0.55	22	211	60	62.43	4730	1.4	OTS 0753	MV8014	OTS 0753	80B5/B14	8014	
	28	166	50	49.18	4370	1.4						
	24	205	60	59.44	4660	1.7	OTS 0752	MV8014	OTS 0752	80B5/B14	8014	
	29	166	50	48.18	4340	2.1						
	35	139	40	40.13	4080	2.2						
	46	104	30	30.24	3720	3.4						
	56	87	25	25.19	3500	3.5						
	71	68	20	19.84	3230	3.5						
	93	52	15	15.09	2950	3.8						
	14.4	328	60	62.43	5480	0.91	OTS 0753	MV8026	OTS 0753	80B5/B14	8026	
	18.3	258	50	49.18	5060	0.93						
	15.1	319	60	59.44	5390	1.1	OTS 0752	MV8026	OTS 0752	80B5/B14	8026	
	18.7	259	50	48.18	5030	1.4						
	22	215	40	40.13	4730	1.4						
	30	162	30	30.24	4310	2.2						
	36	135	25	25.19	4050	2.2						
	45	107	20	19.84	3740	2.3						
	60	81	15	15.09	3410	2.5						
	9.5	498	300	295.18	7990	1.0	OTS 0903	MV7122	OTS 0903	71B5	7122	
	11.6	407	250	240.89	7470	1.2						
	14.0	339	200	200.66	7030	1.4						
	18.5	255	150	151.20	6390	2.0						
	22	213	125	125.95	6010	2.3						
	28	168	100	99.22	5550	2.3						
	37	127	75	75.45	5070	2.4						
	45	105	60	62.43	4760	4.6						
	57	83	50	49.18	4390	4.6						
	9.3	511	150	151.20	8050	1.0						
	11.1	425	125	125.95	7580	1.1	OTS 0903	MV8014	OTS 0903	80B5/B14	8014	
	14.1	335	100	99.22	7000	1.1						
	18.6	255	75	75.45	6390	1.2						
	22	211	60	62.43	6000	2.3						
	28	166	50	49.18	5540	2.3	OTS 0902	MV8014	OTS 0902	80B5/B14	8014	
	24	204	60	59.04	5890	2.5						
	29	166	50	48.18	5500	3.0						
	35	139	40	40.13	5170	3.5						
	46	104	30	30.24	4710	4.8	OTS 0903	MV8026	OTS 0903	80B5/B14	8026	
	14.4	328	60	62.43	6950	1.5						
	18.3	258	50	49.18	6420	1.5						
	15.2	317	60	59.04	6820	1.6	OTS 0902	MV8026	OTS 0902	80B5/B14	8026	


OTS性能参数 / PERFORMANCE PARAMETER

	P _{1n}	n ₂	M _{2max}	i	i	F _{r2}	fs					
	[kW]	[r/min]	[Nm]	公称 Nominal	实际 Actual	[N]						
0.55	18.7	259	50	48.18	6370	1.9	OTS 0902	MV8026	OTS 0902	80B5/B14	8026	
	22	215	40	40.13	6000	2.2						
	30	162	30	30.24	5460	3.1						
	36	135	25	25.19	5130	3.5						
	45	107	20	19.84	4740	3.6						
	60	81	15	15.09	4330	3.7	OTS 1103	MV7122	OTS 1103	71B5	7122	
	9.5	500	300	296.10	8880	1.5						
	11.5	412	250	244.29	8330	1.8						
	13.6	348	200	206.29	7870	2.2						
	18.3	259	150	153.33	7130	2.9						
	22	219	125	129.48	6740	3.4						
	27	175	100	103.64	6260	3.7	OTS 1103	MV8014	OTS 1103	80B5	8014	
	37	128	75	75.55	5630	4.1						
	5.7	825	250	244.29	10000	0.91						
	6.8	697	200	206.29	9920	1.1						
	9.1	518	150	153.33	8980	1.4						
	10.8	437	125	129.48	8490	1.7						
	13.5	350	100	103.64	7880	1.9	OTS 1102	MV8014	OTS 1102	80B5	8014	
	18.5	255	75	75.55	7090	2.0						
	22	217	60	64.18	6720	3.5						
	27	173	50	51.37	6240	3.7						
	24	204	60	59.22	6540	3.7	OTS 1103	MV8026	OTS 1103	80B5	8026	
	29	169	50	48.86	6130	4.4						
	5.9	805	150	153.33	10000	0.93						
	7.0	680	125	129.48	9840	1.1						
	8.7	544	100	103.64	9130	1.2	OTS 1102	MV8026	OTS 1102	80B5	8026	
	11.9	397	75	75.55	8220	1.3						
	14.0	337	60	64.18	7780	2.2						
	17.5	270	50	51.37	7230	2.4						
	15.2	318	60	59.22	7580	2.4	OTS 0502	MV8024	OTS 0502	80B5/B14	8024	
	18.4	262	50	48.86	7110	2.9						
	22	222	40	41.26	6720	3.4						
	29	165	30	30.67	6090	4.6						
0.75	48	138	30	29.33	2350	0.94	OTS 0502	MV8024	OTS 0502	80B5/B14	8024	
	58	113	25	24.07	2200	1.1						
	69	95	20	20.21	2080	1.1						
	94	70	15	14.92	1880	1.1						
	112	59	12.5	12.47	1770	2.2						
	134	49	10	10.47	1670	2.0						
	181	36	7.5	7.73	1510	2.2						


OTS性能参数 / PERFORMANCE PARAMETER

	P _{1n}	n ₂	M _{2max}	i	i	F _{r2}	fs					
	[kW]	[r/min]	[Nm]	公称 Nominal	实际 Actual	[N]						
0.75		72	91	12.5	12.47	2050	1.4	OTS 0502	MV90S6	OTS 0502	90B5/B14	90S6
		86	77	10	10.47	1930	1.3					
		116	57	7.5	7.73	1750	1.4					
		44	146	60	63.33	2760	1.2	OTS 0633	MV8012	OTS 0633	80B5/B14	8012
		53	121	50	52.48	2590	1.2					
		29	229	50	48.71	3190	0.87	OTS 0632	MV8024	OTS 0632	80B5/B14	8024
		36	185	40	39.29	2970	0.97					
		46	143	30	30.31	2720	1.4					
		57	115	25	24.44	2530	1.6					
		69	95	20	20.25	2380	1.6					
		95	69	15	14.67	2130	1.6					
		110	60	12.5	12.67	2030	3.0					
		133	49	10	10.50	1910	3.0					
		184	36	7.5	7.60	1710	3.1					
		30	222	30	30.31	3150	0.9	OTS 0632	MV90S6	OTS 0632	90B5/B14	90S6
		37	179	25	24.44	2930	1.0					
		44	148	20	20.25	2760	1.0					
		61	107	15	14.67	2470	1.0					
		71	93	12.5	12.67	2360	1.9					
		86	77	10	10.50	2210	2.0					
		118	56	7.5	7.60	1990	2.0					
		18.5	348	150	151.20	5040	1.0	OTS 0753	MV8012	OTS 0753	80B5/B14	8012
		22	290	125	125.95	4750	1.0					
		28	228	100	99.22	4380	1.1					
		37	174	75	75.45	4000	1.2					
		45	144	60	62.43	3750	2.1					
		57	113	50	49.18	3470	2.1					
		22	287	60	62.43	4730	1.0	OTS 0753	MV8024	OTS 0753	80B5/B14	8024
		28	226	50	49.18	4370	1.1					
		24	280	60	59.44	4660	1.3	OTS 0752	MV8024	OTS 0752	80B5/B14	8024
		29	227	50	48.18	4340	1.5					
		35	189	40	40.13	4080	1.6					
		46	142	30	30.24	3720	2.5					
		56	119	25	25.19	3500	2.5					
		71	93	20	19.84	3230	2.6					
		93	71	15	15.09	2950	2.8					
		18.7	353	50	48.18	5030	1.0	OTS 0752	MV90S6	OTS 0752	90B5/B14	90S6
		22	294	40	40.13	4730	1.0					
		30	221	30	30.24	4310	1.6					
		36	184	25	25.19	4050	1.6					


OTS性能参数 / PERFORMANCE PARAMETER

	P _{1n}	n ₂	M _{2max}	i	i	F _{r2}	fs					
	[kW]	[r/min]	[Nm]	公称 Nominal	实际 Actual	[N]						
0.75		45	145	20	19.84	3740	1.7	OTS 0752	MV90S6	OTS 0752	90B5/B14	90S6
		60	110	15	15.09	3410	1.8					
		72	91	12.5	12.49	3210	3.3					
		91	72	10	9.84	2960	3.3					
		120	55	7.5	7.48	2700	3.7					
		11.6	555	250	240.89	7470	0.9	OTS 0903	MV8012	OTS 0903	80B5/B14	8012
		14.0	462	200	200.66	7030	1.0					
		18.5	348	150	151.20	6390	1.4					
		22	290	125	125.95	6010	1.7					
		28	228	100	99.22	5550	1.7					
		37	174	75	75.45	5070	1.7					
		45	144	60	62.43	4760	3.3					
		57	113	50	49.18	4390	3.4					
		11.1	580	125	125.95	7580	0.83	OTS 0903	MV8024	OTS 0903	80B5/B14	8024
		14.1	457	100	99.22	7000	0.83					
		18.6	247	75	75.45	6390	0.86					
		22	287	60	62.43	6000	1.7					
		28	226	50	49.18	5540	1.7					
		24	278	60	59.04	5890	1.8	OTS 0902	MV8024	OTS 0902	80B5/B14	8024
		29	227	50	48.18	5500	2.2					
		35	189	40	40.13	5170	2.5					
		46	142	30	30.24	4710	3.5					
		56	119	25	25.19	4430	4.0					
		71	93	20	19.84	4090	4.1					
		93	71	15	15.09	3730	4.2					
		14.4	447	60	62.43	6950	1.1	OTS 0903	MV90S6	OTS 0903	90B5/B14	90S6
		18.3	352	50	49.18	6420	1.1					
		15.2	432	60	59.04	6820	1.2	OTS 0902	MV90S6	OTS 0902	90B5/B14	90S6
		18.7	353	50	48.18	6370	1.4					
		22	294	40	40.13	6000	1.6					
		30	221	30	30.24	5460	2.3					
		36	184	25	25.19	5130	2.6					
		45	145	20	19.84	4740	2.6					
		60	110	15	15.09	4330	2.7					
		9.5	682	300	296.10	8880	1.1	OTS 0902	MV8012	OTS 0902	80B5	8012
		11.5	562	250	244.29	8330	1.3					
		13.6	475	200	206.29	7870	1.6					
		18.3	353	150	153.33	7130	2.1					
		22	298	125	129.48	6740	2.5					
		27	239	100	103.64	6260	2.7					



OTS性能参数 / PERFORMANCE PARAMETER

	P _{1n}	n ₂	M _{2max}	i	i	F _{r2}	fs					
	[kW]	[r/min]	[Nm]	公称 Nominal	实际 Actual	[N]						
0.75	37	174	75	75.55	5630	3.0		OTS 1103	Mv8012	OTS 1103	80B5	8012
	9.1	706	150	153.33	8980	1.1		OTS 1103	MV8024	OTS 1103	80B5	8024
	10.8	596	125	129.48	8490	1.3						
	13.5	477	100	103.64	7880	1.4						
	18.5	348	75	75.55	7090	1.5						
	22	296	60	64.18	6720	2.5						
	27	237	50	51.37	6240	2.7						
	24	279	60	59.22	6540	2.7		OTS 1102	MV8024	OTS 1102	80B5	8024
	29	230	50	48.86	6130	3.3						
	34	194	40	41.26	5800	3.9						
	8.7	742	100	103.64	9130	0.88		OTS 1103	MV90S6	OTS 1103	90B5/B14	90S6
	11.9	541	75	75.55	8220	0.96						
	14.0	460	60	64.18	7780	1.6						
	17.5	368	50	51.37	7230	1.8						
	15.2	434	60	59.22	7580	1.7		OTS 1102	MV90S6	OTS 1102	90B5/B14	90S6
	18.4	358	50	48.86	7110	2.1						
	22	302	40	41.26	6720	2.5						
	29	225	30	30.67	6090	3.3						
	35	190	25	25.90	5750	4.0						
	43	152	20	20.73	5340	4.3						
1.1	112	86	12.5	12.47	1770	1.5		OTS 0502	MV90S4	OTS 0502	90B5/B14	90S4
	134	72	10	10.47	1670	1.4						
	181	53	7.5	7.73	1510	1.5						
	72	134	12.5	12.47	2050	0.97		OTS 0502	MV90L6	OTS 0502	90B5/B14	90L6
	86	112	10	10.47	1930	0.89						
	116	83	7.5	7.73	1750	0.96						
	46	209	30	30.31	2720	0.96		OTS 0632	MV90S4	OTS 0632	90B5/B14	90S4
	57	169	25	24.44	2530	1.1						
	69	140	20	20.25	2380	1.1						
	95	101	15	14.67	2130	1.1						
	110	87	12.5	12.67	2030	2.1						
	133	72	10	10.50	1910	2.1						
	184	52	7.5	7.60	1710	2.1						
	71	136	12.5	12.67	2360	1.3		OTS 0632	MV90L6	OTS 0632	90B5/B14	90L6
	86	113	10	10.50	2210	1.3						
	118	82	7.5	7.60	1990	1.3						
	45	211	60	62.43	3750	1.4		OTS 0753	Mv8022	OTS 0753	80B5/B14	8022
	57	166	50	49.18	3470	1.4						
	24	410	60	59.44	4660	0.85		OTS 0752	MV90S4	OTS 0752	90B5/B14	90S4
	29	333	50	48.18	4340	1.1						


OTS性能参数 / PERFORMANCE PARAMETER

	P _{1n}	n ₂	M _{2max}	i	i	F _{r2}	fs					
	[kW]	[r/min]	[Nm]	公称 Nominal	实际 Actual	[N]						
1.1	35	277	40	40.13	4080	1.1		OTS 0752	MV90S4	OTS 0752	90B5/B14	90S4
	46	209	30	30.24	3720	1.7						
	56	174	25	25.19	3500	1.7						
	71	137	20	19.84	3230	1.8						
	93	104	15	15.09	2950	1.9						
	112	86	12.5	12.49	2770	3.5						
	142	68	10	9.84	2550	3.5						
	187	52	7.5	7.48	2330	3.9						
	30	325	30	30.24	4310	1.1		OTS 0752	MV90L6	OTS 0752	90B5/B14	90L6
	36	271	25	25.19	4050	1.1						
	45	213	10	19.84	3740	1.1						
	60	162	15	15.09	3410	1.2						
	72	134	12.5	12.49	3210	2.2						
	91	106	10	9.84	2960	2.3						
	120	80	7.5	7.48	2700	2.5						
	18.5	511	150	151.20	6390	1.0		OTS 0903	MV8022	OTS 0903	80B5/B14	8022
	22	425	125	125.95	6010	1.1						
	28	335	100	99.22	5550	1.1						
	37	255	75	75.45	5070	1.2						
	45	211	60	62.43	4760	2.3						
	57	166	50	49.18	4390	2.3		OTS 0903	MV90S4	OTS 0903	90B5/B14	90S4
	22	422	60	62.43	6000	1.1						
	28	332	50	49.18	5540	1.1		OTS 0902	MV90S4	OTS 0902	90B5/B14	90S4
	24	408	60	59.04	5890	1.2						
	29	333	50	48.18	5500	1.5						
	35	277	40	40.13	5170	1.7						
	46	209	30	30.24	4710	2.4						
	56	174	25	25.19	4430	2.8						
	71	137	20	19.84	4090	2.8						
	93	104	15	15.09	3730	2.9						
	15.2	634	60	59.04	6820	0.8		OTS 0902	MV90L6	OTS 0902	90B5/B14	90L6
	18.7	517	50	48.18	6370	0.97						
	22	431	40	40.13	6000	1.1						
	30	325	30	30.24	5460	1.5						
	36	271	25	25.19	5130	1.8						
	45	213	20	19.84	4740	1.8						
	60	162	15	15.09	4330	1.9						
	72	134	12.5	12.49	4060	3.6						
	91	106	10	9.84	3750	3.6						
	120	80	7.5	7.48	3420	3.7						



OTS性能参数 / PERFORMANCE PARAMETER

	P _{1n}	n ₂	M _{2max}	i	i	F _{r2}	fs	  		
	[kW]	[r/min]	[Nm]	公称 Nominal	实际 Actual	[N]				
1.1	11.5	825	250	244.29	8330	0.91	OTS 1103 MV8022	OTS 1103 80B5	8022	
	13.6	697	200	206.29	7870	1.1				
	18.3	518	150	153.33	7130	1.4				
	22	437	125	129.48	6740	1.7				
	27	350	100	103.64	6260	1.9				
	37	255	75	75.55	5630	2.0				
	44	217	60	64.18	5330	3.5				
	55	173	50	51.37	4950	3.7				
	10.8	874	125	129.48	8490	0.86	OTS 1103 MV90S4	OTS 1103 90B5/B14	90S4	
	13.5	700	100	103.64	7880	0.93				
	18.5	510	75	75.55	7090	1.0				
	22	433	60	64.18	6720	1.7				
	27	347	50	51.37	6240	1.9				
	24	409	60	59.22	6540	1.8	OTS 1102 MV90S4	OTS 1102 90B5/B14	90S4	
	29	337	50	48.86	6130	2.2				
	34	285	40	41.26	5800	2.6				
	46	212	30	30.67	5250	3.5				
	54	179	25	25.90	4960	4.2				
	68	143	20	20.73	4610	4.5				
	14.0	674	60	64.18	7780	1.1	OTS 1103 MV90L6	OTS 1103 90B5/B14	90L6	
	17.5	540	50	51.37	7230	1.2				
	15.2	636	60	59.22	7580	1.2	OTS 1102 MV90L6	OTS 1102 90B5/B14	90L6	
	18.4	525	50	48.86	7110	1.4				
	22	443	40	41.26	6720	1.7				
	29	329	30	30.67	6090	2.3				
	35	278	25	25.90	5750	2.7				
	43	223	20	20.73	5340	2.9				
	60	162	15	15.11	4810	3.2				
	112	117	12.5	12.47	1770	1.1	OTS 0502 MV90L4	OTS 0502 90B5/B14	90L4	
	134	99	10	10.47	1670	1.0				
	181	73	7.5	7.73	1510	1.1				
1.5	57	230	25	24.44	2530	0.8	OTS 0632 MV90L4	OTS 0632 90B5/B14	90L4	
	69	191	20	20.25	2380	0.8				
	95	138	15	14.67	2130	0.8				
	110	119	12.5	12.67	2030	1.5				
	133	99	10	10.50	1910	1.5				
	184	72	7.5	7.60	1710	1.5				
	45	287	60	62.43	3750	1.0	OTS 0753 MV90S2	OTS 0753 90B5/B14	90S2	
	57	226	50	49.18	3470	1.1				
	29	454	50	48.18	4340	0.77	OTS 0752 MV90L4	OTS 0752 90B5/B14	90L4	

OTS性能参数 / PERFORMANCE PARAMETER

	P _{1n}	n ₂	M _{2max}	i	i	F _{r2}	fs	  		
	[kW]	[r/min]	[Nm]	公称 Nominal	实际 Actual	[N]				
1.1	35	378	40	40.13	4080	0.79	OTS 0752 MV90L4	OTS 0752 90B5/B14	90L4	
	46	285	30	30.24	3720	1.2				
	56	237	25	25.19	3500	1.3				
	71	187	20	19.84	3230	1.3				
	93	142	15	15.09	2950	1.4				
	112	118	12.5	12.49	2770	2.6				
	142	93	10	9.84	2550	2.6				
	187	70	7.5	7.48	2330	2.8				
	45	291	20	19.84	3740	0.83	OTS 0752 MV100L6	OTS 0752 100B5/B14	100L6	
	60	221	15	15.09	3410	0.91				
	72	183	12.5	12.49	3210	1.6				
	91	144	10	9.84	2960	1.7				
	120	110	7.5	7.48	2700	1.8				
	22	580	125	125.95	6010	0.83	OTS 0903 MV90S2	OTS 0903 90B5/B14	90S2	
	28	457	100	99.22	5550	0.85				
	37	347	75	75.45	5070	0.86				
	45	287	60	62.43	4760	1.7				
	57	226	50	49.18	4390	1.7				
1.5	24	556	60	59.04	5890	0.9	OTS 0902 MV90L4	OTS 0902 90B5/B14	90L4	
	29	454	50	48.18	5500	1.1				
	35	378	40	40.13	5170	1.3				
	46	285	30	30.24	4710	1.8				
	56	237	25	25.19	4430	2.0				
	71	187	20	19.84	4090	2.0				
	93	142	15	15.09	3730	2.1				
	112	118	12.5	12.49	3510	4.1				
	142	93	10	9.84	3240	4.1				
	187	70	7.5	7.48	2950	4.3				
	30	443	30	30.24	5460	1.1	OTS 0902 MV100L6	OTS 0902 100B5/B14	100L6	
	36	369	25	25.19	5130	1.3				
	45	291	20	19.84	4740	1.3				
	60	221	15	15.09	4330	1.4				
	72	183	12.5	12.49	4060	2.6				
	91	144	10	9.84	3750	2.6				
	120	110	7.5	7.48	3420	2.7				
	18.3	706	150	153.33	7130	1.1	OTS 1103 MV90S2	OTS 1103 90B5/B14	90S2	
	22	596	125	129.48	6740	1.3				
	27	477	100	103.64	6260	1.4				
	37	348	75	75.55	5630	1.5				
	44	296	60	64.18	5330	2.5				



OTS性能参数 / PERFORMANCE PARAMETER

P _{1n} [kW]	n ₂ [r/min]	M _{2max} [Nm]	i 公称 Nominal	i 实际 Actual	F _{r2} [N]	fs					
1.5	55	237	50	51.37	4950	2.7	OTS 1103	MV90S2	OTS 1103	90B5/B14	90S2
	22	591	60	64.18	6720	1.3	OTS 1103	MV90L4	OTS 1103	90B5/B14	90L4
	27	473	50	51.37	6240	1.4					
	24	557	60	59.22	6540	1.3					
	29	460	50	48.86	6130	1.6					
	34	388	40	41.26	5800	1.9					
	46	289	30	30.67	5250	2.6	OTS 1102	MV90L4	OTS 1102	90B5/B14	90L4
	54	244	25	25.90	4960	3.1					
	68	195	20	20.73	4610	3.3					
	93	142	15	15.11	4150	3.7					
	15.2	867	60	59.22	7580	0.86					
	18.4	715	50	48.86	7110	1.0					
	22	604	40	41.26	6720	1.2					
	29	449	30	30.67	6090	1.7					
	35	379	25	25.90	5750	2.0					
	43	304	20	20.73	5340	2.1	OTS 1102	MV100L6	OTS 1102	100B5/B14	100L6
	60	221	16	15.11	4810	2.4					
	70	188	12.5	12.84	4550	4.0					
	88	150	10	10.27	4220	4.3					
	120	110	7.5	7.49	3800	4.7					
2.2	46	418	30	30.24	3720	0.84					
	56	348	25	25.19	3500	0.86					
	71	274	20	19.84	3230	0.88					
	93	208	15	15.09	2950	0.96	OTS 0752	MV100L1-4	OTS 0752	100B5/B14	100L1-4
	112	172	12.5	12.49	2770	1.7					
	142	136	10	9.84	2550	1.8					
	187	103	7.5	7.48	2330	1.9					
	72	268	12.5	12.49	3210	1.1					
	91	211	10	9.84	2960	1.1	OTS 0752	MV112M6	OTS 0752	112B5/B14	112M6
	120	161	7.5	7.48	2700	1.2					
	45	422	60	62.43	4760	1.1	OTS 0903	MV90L2	OTS 0903	90B5/B14	90L2
	57	332	50	49.18	4390	1.1					
	35	554	40	40.13	5170	0.87					
	46	418	30	30.24	4710	1.2					
	56	348	25	25.19	4430	1.4					
	71	274	20	19.84	4090	1.4	OTS 0902	MV100L1-4	OTS 0902	100B5/B14	100L1-4
	93	208	15	15.09	3730	1.4					
	112	172	12.5	12.49	3510	2.8					
142	136	10	9.84	3240	2.8						
187	103	7.5	7.48	2950	2.9						

OTS性能参数 / PERFORMANCE PARAMETER

	P _{1n}	n ₂	M _{2max}	i	i	F _{r2}	fs				
	[kW]	[r/min]	[Nm]	公称 Nominal	实际 Actual	[N]					
2.2	36	541	25	25.19	5130	0.9	OTS 0902 MV112M6	OTS 0902 112B5/B14	112M6		
	45	426	20	19.84	4740	0.9					
	60	324	15	15.09	4330	0.93					
	72	268	12.5	12.49	4060	1.8					
	91	211	10	9.84	3750	1.8					
	120	161	7.5	7.48	3420	1.9					
	22	874	125	129.48	6740	0.86	OTS 1103 MV90L2	OTS 1103 90B5/B14	90L2		
	27	700	100	103.64	6260	0.93					
	37	510	75	75.55	5630	1.0					
	44	433	60	64.18	5330	1.7					
	55	347	50	51.37	4950	1.9					
	24	818	60	59.22	6540	0.92	OTS 1102 MV100L1-4	OTS 1102 100B5/B14	100L1-4		
	29	675	50	48.86	6130	1.1					
	34	570	40	41.26	5800	1.3					
	46	423	30	30.67	5250	1.8					
	54	358	25	25.90	4960	2.1					
	68	286	20	20.73	4610	2.3					
	93	209	15	15.11	4150	2.5					
	109	177	12.5	12.84	3930	4.2					
	136	142	10	10.27	3650	4.6					
	187	103	7.5	7.49	3280	5.0					
3.0	29	659	30	30.67	6090	1.1	OTS 1102 MV112M6	OTS 1102 112B5/B14	112M6		
	35	556	25	25.90	5750	1.3					
	43	445	20	20.73	5340	1.5					
	60	325	15	15.11	4810	1.6					
	70	276	12.5	12.84	4550	2.7					
	88	221	10	10.27	4220	2.9					
	120	161	7.5	7.49	3800	3.2	OTS 0752 MV100L2-4	OTS 0752 100B5/B14	100L2-4		
	112	235	12.5	12.49	2770	1.3					
	142	185	10	9.84	2550	1.3					
	187	141	7.5	7.48	2330	1.4	OTS 0902 MV100L2-4	OTS 0902 100B5/B14	100L2-4		
	46	569	30	30.24	4710	0.9					
	56	474	25	25.19	4430	1.0					
	71	374	20	19.84	4090	1.0					
	93	284	15	15.09	3730	1.1					
	112	235	12.5	12.49	3510	2.0					
	142	185	10	9.84	3240	2.1					
	187	141	7.5	7.48	2950	2.1					
	44	591	60	64.18	5330	1.3	OTS 1103 MV100L2	OTS 1103 100B5/B14	100L2		
	55	473	50	51.37	4950	1.4					

OTS性能参数 / PERFORMANCE PARAMETER

P _{1n} [kW]	n ₂ [r/min]	M _{2max} [Nm]	i 公称 Nominal	i 实际 Actual	F _{r2} [N]	fs			
3.0	34	777	40	41.26	5800	0.97	OTS 1102 MV100L2-4	OTS 1102 100B5/B14	100L2-4
	46	577	30	30.67	5250	1.3			
	54	488	25	25.90	4960	1.5			
	68	390	20	20.73	4610	1.7			
	93	284	15	15.11	4150	1.8			
	109	242	12.5	12.84	3930	3.1			
	136	193	10	10.27	3650	3.4			
	187	141	7.5	7.49	3280	3.7			
	35	759	25	25.90	5750	1.0	OTS 1102 MV132S6	OTS 1102 132B5	132S6
	43	607	20	20.73	5340	1.1			
	60	443	15	15.11	4810	1.2			
	70	376	12.5	12.84	4550	2.0			
	88	301	10	10.27	4220	2.2			
	120	219	7.5	7.49	3800	2.4			
4.0	112	314	12.5	12.49	2770	0.96	OTS 0752 MV112M4	OTS 0752 112B5/B14	112M4
	142	247	10	9.84	2550	1.0			
	187	188	7.5	7.48	2330	1.1			
	112	314	12.5	12.49	3510	1.5	OTS 0902 MV112M4	OTS 0902 112B5/B14	112M4
	142	247	10	9.84	3240	1.5			
	187	188	7.5	7.48	2950	1.6			
	46	770	30	30.67	5250	1.0	OTS 1102 MV112M4	OTS 1102 112B5/B14	112M4
	54	650	25	25.90	4960	1.2			
	68	520	20	20.73	4610	1.2			
	93	379	15	15.11	4150	1.4			
	109	322	12.5	12.84	3930	2.3			
	136	258	10	10.27	3650	2.5			
5.5	187	188	7.5	7.49	3280	2.8			
	68	716	20	20.73	4610	0.9	OTS 1102 MV132S4	OTS 1102 132B5	132S4
	93	522	15	15.11	4150	1.0			
	109	443	12.5	12.84	3930	1.7			
	136	354	10	10.27	3650	1.8			
	187	259	7.5	7.49	3280	2.0			

OTS性能参数 / PERFORMANCE PARAMETER

OTS.. HS性能参数 / Performance parameter							n ₁ =1400r/min
M _{2max} [Nm]	n ₂ [r/min]	i 公称 Nominal	i 实际 Actual	P _{1n} [kW]	F _{r2} [N]	F _{r1} [N]	
130	4.8	300	291.79	0.07	4100	400	OTS 0503..HS
130	5.7	250	244.29	0.09	4100	400	
130	7.0	200	200.44	0.11	4100	400	
130	9.5	150	146.67	0.14	4000	400	
130	11.6	125	120.34	0.18	3770	400	
100	13.9	100	101.04	0.16	3560	400	
80	18.8	75	74.62	0.17	3220	400	
130	22	60	62.36	0.34	3030	400	
100	27	50	52.36	0.31	2860	400	
130	24	60	58.36	0.35	2960	400	OTS 0502..HS
130	29	50	48.86	0.42	2790	400	
130	35	40	40.09	0.52	2610	400	
130	48	30	29.33	0.71	2350	400	
130	58	25	24.07	0.86	2200	400	
100	69	20	20.21	0.79	2080	400	
80	94	15	14.92	0.85	1880	400	
130	112	12.5	12.47	1.7	1770	400	
100	134	10	10.47	1.5	1670	400	
80	181	7.5	7.73	1.6	1510	400	
200	4.6	300	302.50	0.11	4800	400	OTS 0633..HS
200	5.7	250	243.57	0.13	4800	400	
180	7.1	200	196.43	0.15	4800	400	
200	9.2	150	151.56	0.21	4650	400	
180	11.5	125	122.22	0.24	4330	400	
150	13.8	100	101.27	0.24	4070	400	
110	19.1	75	73.33	0.24	3650	400	
180	22	60	63.33	0.46	3480	400	
150	27	50	52.48	0.47	3270	400	
200	23	60	60.50	0.53	3430	530	OTS 0632..HS
200	29	50	48.71	0.65	3190	530	
180	36	40	39.29	0.73	2970	530	
200	46	30	30.31	1.1	2720	530	
180	57	25	24.44	1.2	2530	530	
150	69	20	20.25	1.2	2380	530	
110	95	15	14.67	1.2	2130	530	
180	110	12.5	12.67	2.3	2030	530	
150	133	10	10.50	2.3	1910	530	
110	184	7.5	7.60	2.3	1710	530	

OTS性能参数 / PERFORMANCE PARAMETER


M _{2max} [Nm]	n ₂ [r/min]	i 公称 Nominal	i 实际 Actual	P _{1n} [kW]	F _{r2} [N]	F _{r1} [N]	
350	4.7	300	297.21	0.19	6500	560	OTS 0753..HS
350	5.8	250	240.86	0.24	6500	560	
300	7.0	200	200.66	0.24	6500	560	
350	9.3	150	151.20	0.38	6500	560	
300	11.1	125	125.95	0.39	5980	560	
240	14.1	100	99.22	0.39	5520	560	
200	18.6	75	75.45	0.43	5040	560	
300	22	60	62.43	0.78	4730	560	
240	28	50	49.18	0.79	4370	560	
350	24	60	59.44	0.94	4660	860	OTS 0752..HS
350	29	50	48.18	1.2	4340	860	
300	35	40	40.13	1.2	4080	860	
350	46	30	30.24	1.8	3720	860	
300	56	25	25.19	1.9	3500	860	
240	71	20	19.84	1.9	3230	860	
200	93	15	15.09	2.1	2950	860	
300	112	12.5	12.49	3.8	2770	860	
240	142	10	9.84	3.9	2550	860	
200	187	7.5	7.48	4.3	2330	860	
500	4.7	300	295.18	0.27	8300	560	OTS 0903..HS
500	5.8	250	240.89	0.34	8300	560	
480	7.0	200	200.66	0.39	8300	560	
500	9.3	150	151.20	0.54	8050	560	
480	11.1	125	125.95	0.62	7580	560	
380	14.1	100	99.22	0.62	7000	560	
300	18.6	75	75.45	0.65	6390	560	
480	22	60	62.43	1.3	6000	560	
380	28	50	49.18	1.3	5540	560	OTS 0902..HS
500	24	60	59.04	1.3	5890	1260	
500	29	50	48.18	1.7	5500	1260	
480	35	40	40.13	1.9	5170	1260	
500	46	30	30.24	2.6	4710	1260	
480	56	25	25.19	3.0	4430	1260	
380	71	20	19.84	3.1	4090	1260	
300	93	15	15.09	3.2	3730	1260	
480	112	12.5	12.49	6.1	3510	1260	
380	142	10	9.84	6.2	3240	1260	
300	187	7.5	7.48	6.4	2950	1260	

OTS性能参数 / PERFORMANCE PARAMETER

M _{2max} [Nm]	n ₂ [r/min]	i 公称 Nominal	i 实际 Actual	P _{1n} [kW]	F _{r2} [N]	F _{r1} [N]	
750	4.7	300	296.10	0.40	10000	740	OTS 1103..HS
750	5.7	250	244.29	0.50	10000	740	
750	6.8	200	206.29	0.59	9920	740	
750	9.1	150	153.33	0.80	8980	740	
750	10.8	125	129.48	0.94	8490	740	
650	13.5	100	103.64	1.0	7880	740	
520	18.5	75	75.55	1.1	7090	740	
750	22	60	64.18	1.9	6720	740	
650	27	50	51.37	2.1	6240	740	
750	24	60	59.22	2.0	6540	1490	OTS 1102..HS
750	29	50	48.86	2.4	6130	1490	
750	34	40	41.26	2.9	5800	1490	
750	46	30	30.67	3.9	5250	1490	
750	54	25	25.90	4.6	4960	1490	
650	68	20	20.73	5.0	4610	1490	
520	93	15	15.11	5.5	4150	1490	
750	109	12.5	12.84	9.3	3930	1490	
650	136	10	10.27	10.1	3650	1490	
520	187	7.5	7.49	11.1	3280	1490	

OTS 外形尺寸图表 / OUTLINE DIMENSION SHEET

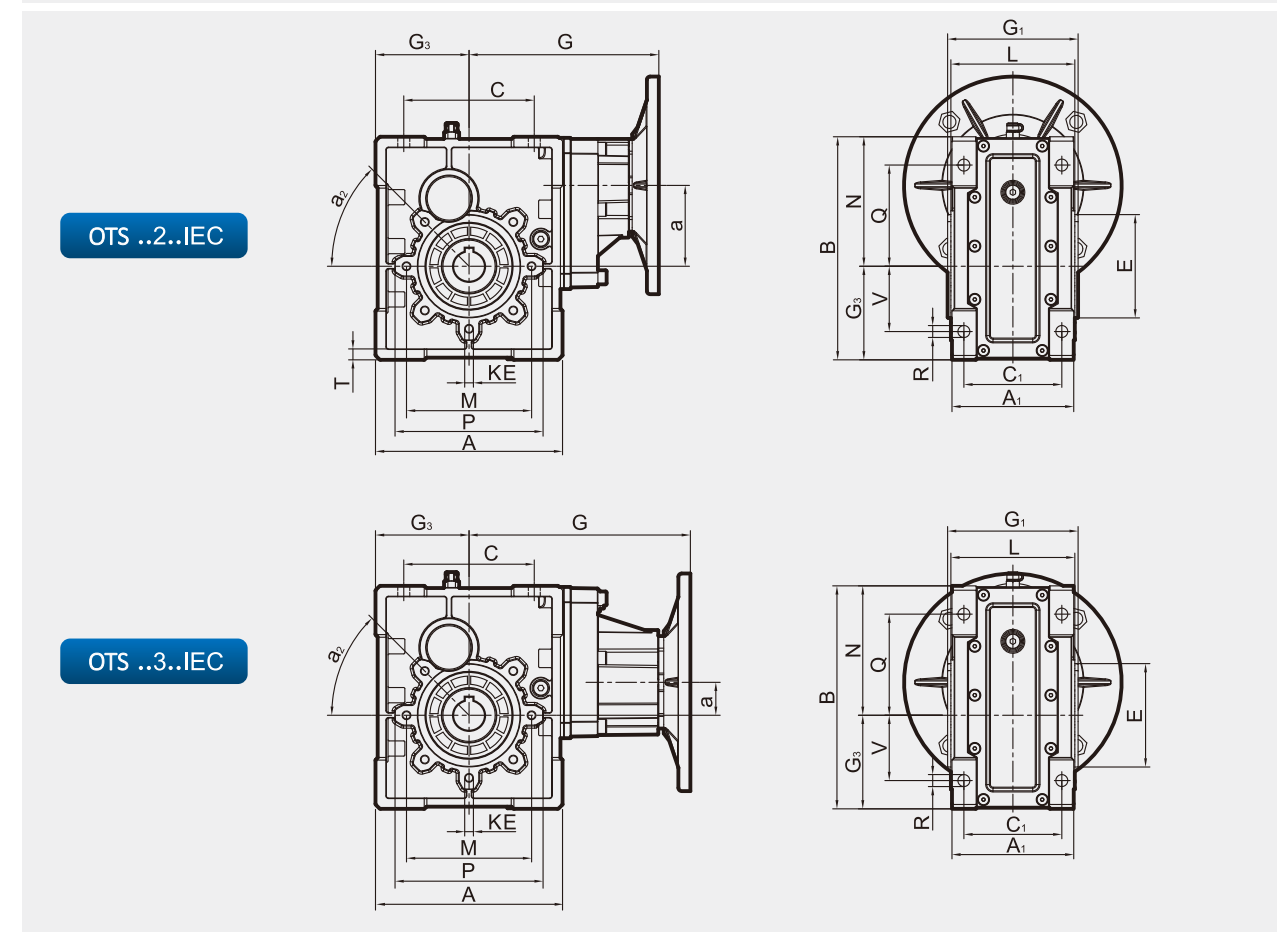OTS ..IEC外形尺寸 / Outline Dimension




OTS	C	A	B	G	G ₃	a	C ₁	KE	a ₂	L	G ₁	M	E _{h8}	A ₁	R	P	Q	N	T	V	kg
0502	80	120	155	132.5	60	57	70	4-M8*12	45°	87	92	85	70	85	8.5	100	75	95	8	40	4.5
0503	80	120	155	148	60	21.5	70	4-M8*12	45°	87	92	85	70	85	8.5	100	75	95	8	40	5
0632	100	144	174	143.5	72	64.5	85	7-M8*14	45°	106	112	95	80	103	8.5	110	80	102	9	50	6.3
0633	100	144	174	169	72	29	85	7-M8*14	45°	106	112	95	80	103	8.5	110	80	102	9	50	7
0752	120	172	205	174	86	74.5	90	7-M8*16	45°	114	120	115	95	112	11	140	93	119	10	60	9.9
0753	120	172	205	203	86	30.5	90	7-M8*16	45°	114	120	115	95	112	11	140	93	119	10	60	10.9
0902	140	206	238	192	103	88	100	7-M10*22	45°	134	140	130	110	130	13	160	102	135	11	70	13.9
0903	140	206	238	220	103	44	100	7-M10*22	45°	134	140	130	110	130	13	160	102	135	11	70	14.9
1102	170	255	295	241.5	127.5	108	115	7-M10*25	45°	148	155	165	130	144	14	185	125	167.5	16	85	28
1103	170	255	295	271.5	127.5	52	155	7-M10*25	45°	148	155	165	130	144	14	185	125	167.5	16	85	30

注：重量 (kg) 不包含电机的重量。
Note: Weight(kg) without the weight of motor.

OTS 外形尺寸图表 / OUTLINE DIMENSION SHEET

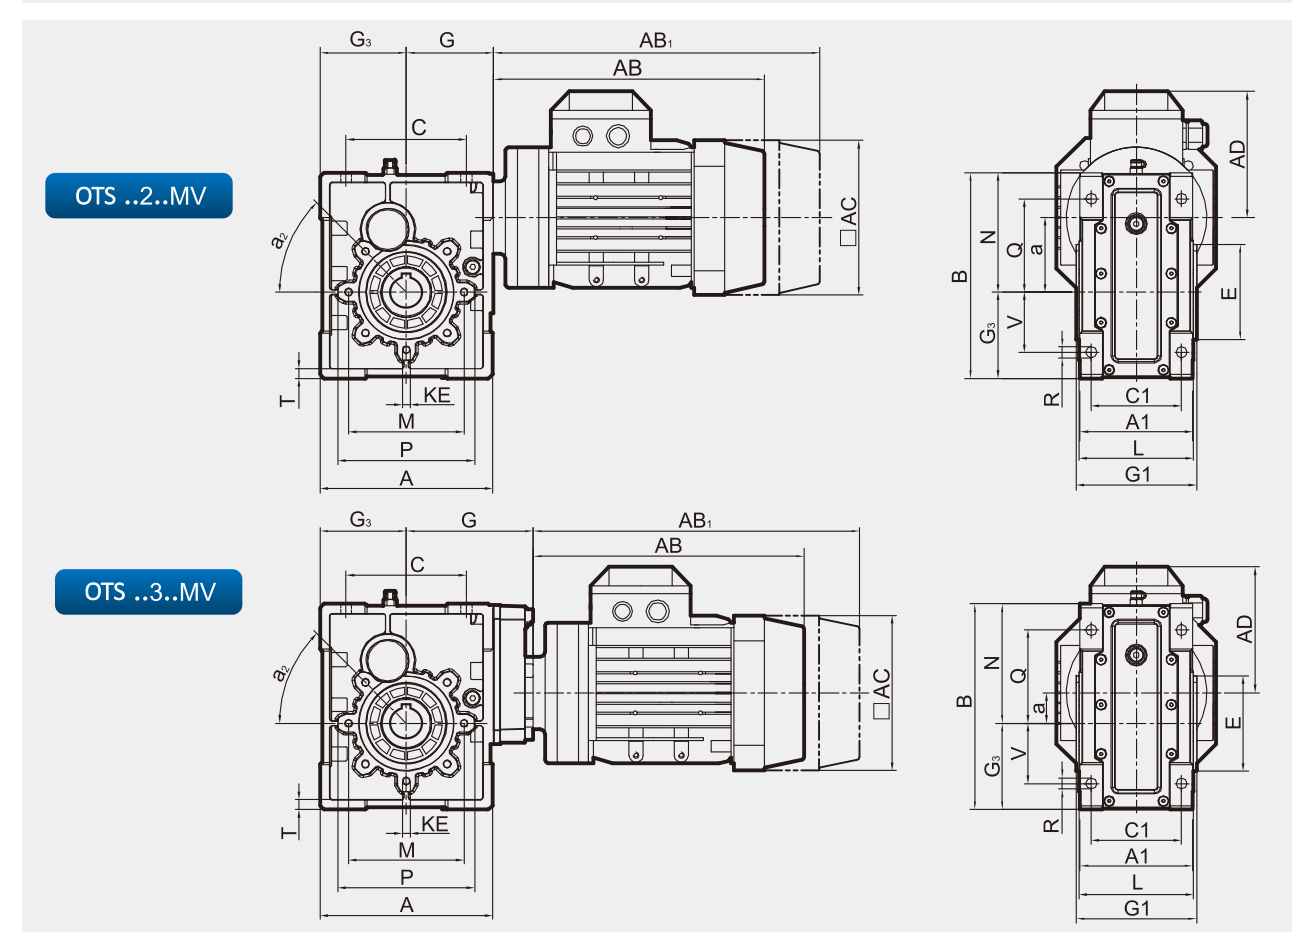OTS ..MV.. 外形尺寸 / Outline Dimension




OTS	C	A	B	G	G ₃	a	C ₁	KE	a ₂	L	G ₁	M	E _{h8}	A ₁	R	P	Q	N	T	V
0502	80	120	155	61	60	57	70	4-M8*12	45°	87	92	85	70	85	8.5	100	75	95	8	40
0503	80	120	155	95	60	21.5	70	4-M8*12	45°	87	92	85	70	85	8.5	100	75	95	8	40
0632	100	144	174	72	72	64.5	85	7-M8*14	45°	106	112	95	80	103	8.5	110	80	102	9	50
0633	100	144	174	106	72	29	85	7-M8*14	45°	106	112	95	80	103	8.5	110	80	102	9	50
0752	120	172	205	87	86	74.5	90	7-M8*16	45°	114	120	115	95	112	11	140	93	119	10	60
0753	120	172	205	126	86	30.5	90	7-M8*16	45°	114	120	115	95	112	11	140	93	119	10	60
0902	140	206	238	104	103	88	100	7-M10*22	45°	134	140	130	110	130	13	160	102	135	11	70
0903	140	206	238	143	103	44	100	7-M10*22	45°	134	140	130	110	130	13	160	102	135	11	70
1102	170	255	295	127.5	127.5	108	115	7-M10*25	45°	148	155	165	130	144	14	185	125	167.5	16	85
1103	170	255	295	177.5	127.5	52	155	7-M10*25	45°	148	155	165	130	144	14	185	125	167.5	16	85

MV..	63	71	80	90S	90L	100	112	132
AB	207	235	250	286	296	320	360	410
AB1	267	305	320	370	370	400	440	507
AC	120	130	145	160	160	185	200	245
AD	104	107	115	122	122	137	155	180

OTS 外形尺寸图表 / OUTLINE DIMENSION SHEET

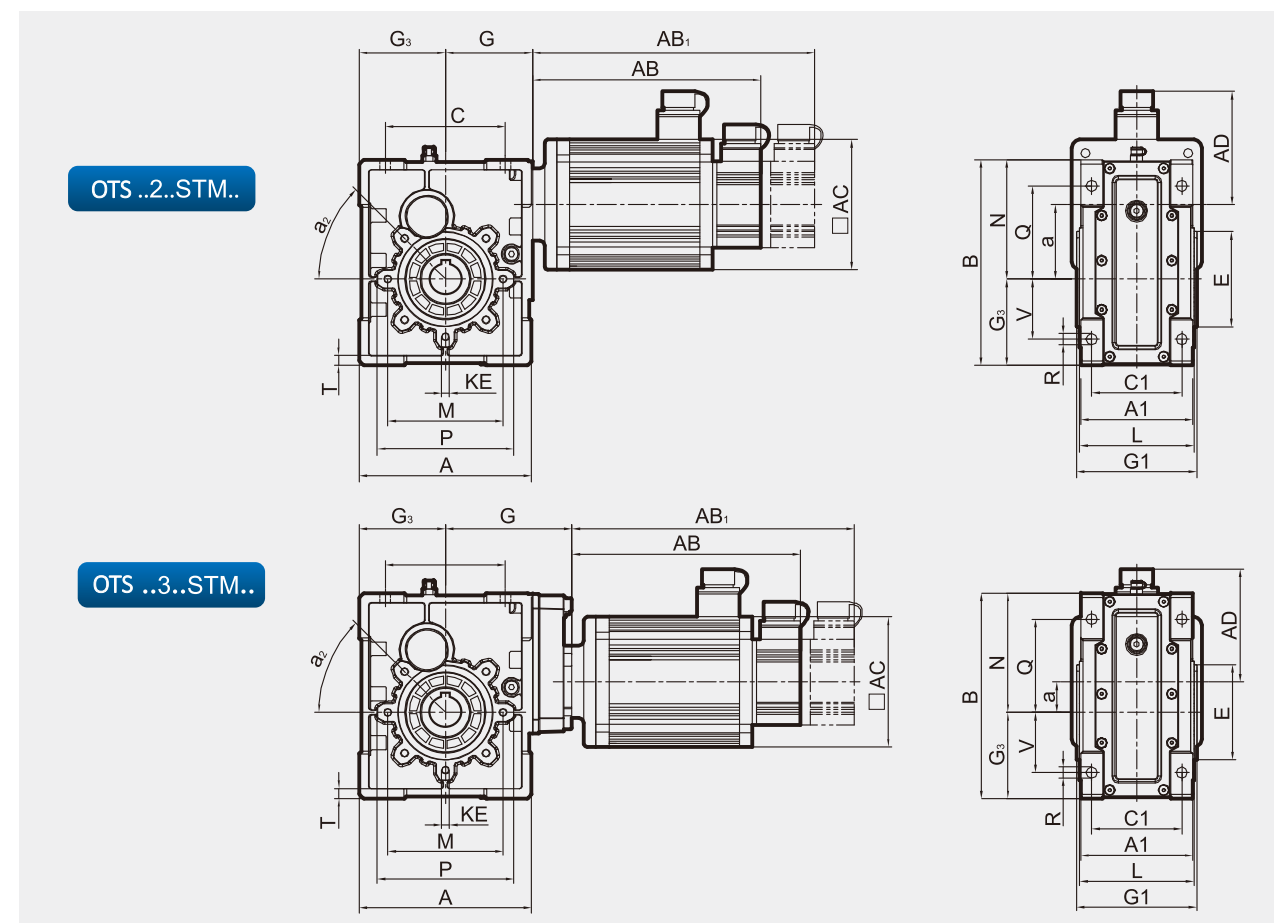OTS ..STM..外形尺寸 / Outline Dimension




STM	AC	AD	M006		M013		M020		M024		M035		M040		M050		M060		M077	
			AB	AB1	AB	AB1	AB	AB1	AB	AB1	AB	AB1	AB	AB1	AB	AB1	AB	AB1	AB	AB1
60	60	76	142	190	167	215	-	-	-	-	-	-	-	-	-	-	-	-	-	
80	80	86	-	-	154	194	-	-	181	221	209	249	221	261	-	-	-	-	-	
90	86.6	89.3	-	-	-	-	-	-	180	228	202	250	212	260	-	-	-	-	-	
110	110	103	-	-	-	-	159	263	-	-	-	-	222	274	234	308	242	274	-	
130	130	113	-	-	-	-	-	-	-	-	-	-	196	253	201	258	209	266	222	
150	150	123	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
180	180	138	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	

STM	M100		M150		M172		M180		M190		M215		M230		M270		M350		M480	
	AB	AB1	AB	AB1	AB	AB1	AB	AB1	AB	AB1	AB	AB1	AB	AB1	AB	AB1	AB	AB1	AB	AB1
130	234	286	271	352	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
150	-	-	260	333	-	-	278	351	-	-	-	-	308	381	332	405	308	381	332	405
180	-	-	-	-	256	328	-	-	252	334	273	345	-	-	292	364	322	394	376	448

AB: 不带抱闸 / Without brake AB1: 带抱闸 / With brake M006: 伺服电机的扭矩 (0.6N·m) / Servo motor(0.6N·m)
 注: 其余尺寸参考 OTS ..MV..外形尺寸 Note: The remaining size refer OTS ..MV.. outline dimension


OTS 外形尺寸图表 / OUTLINE DIMENSION SHEET

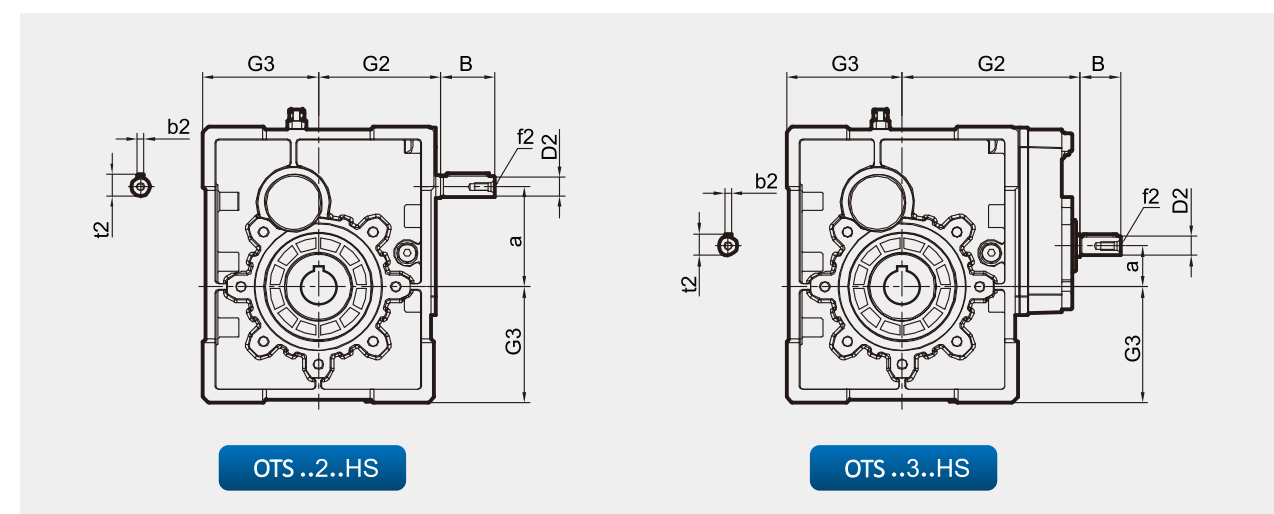OTS ..HS 外形尺寸 / Outline Dimension



OTS	B	D _{2φ}	G ₂	G ₃	a	b ₂	t ₂	f ₂
0502	23	11	65	60	57	4	12.5	-
0503	23	11	100	60	21.5	4	12.5	-
0632	30	14	76	72	64.5	5	16	M6
0633	23	11	111	72	29	4	12.5	-
0752	40	16	91	86	74.5	5	18	M6
0753	30	14	132	86	30.5	5	16	M6
0902	40	19	107	103	88	6	21.5	M6
0903	30	14	146	103	44	5	16	M6
1102	50	24	132	127.5	108	8	27	M6
1103	40	19	181	127.5	52	6	21.5	M6

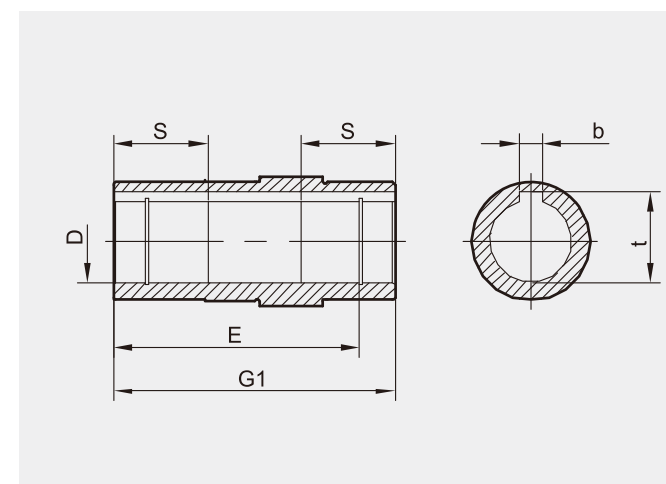
OTS..空心输出轴尺寸 / Hollow Output Shaft Dimension



OTS	S	E	G1	D _{H8}	b	t
050	30	77	92	20	6	22.8
				24	8	27.3
				25	8	28.3
063	36	97	112	25	8	28.3
				28	8	31.3
				30	8	33.3
075	40	105	120	28	8	31.3
				30	8	33.3
				35	10	38.3
090	45	122	140	35	10	38.3
				38	10	41.3
				40	12	43.3
110	50	131	155	40	12	43.3
				42	12	45.3
				45	14	48.3

OTS 连接尺寸图表 / CONNECTING DIMENSION SHEET

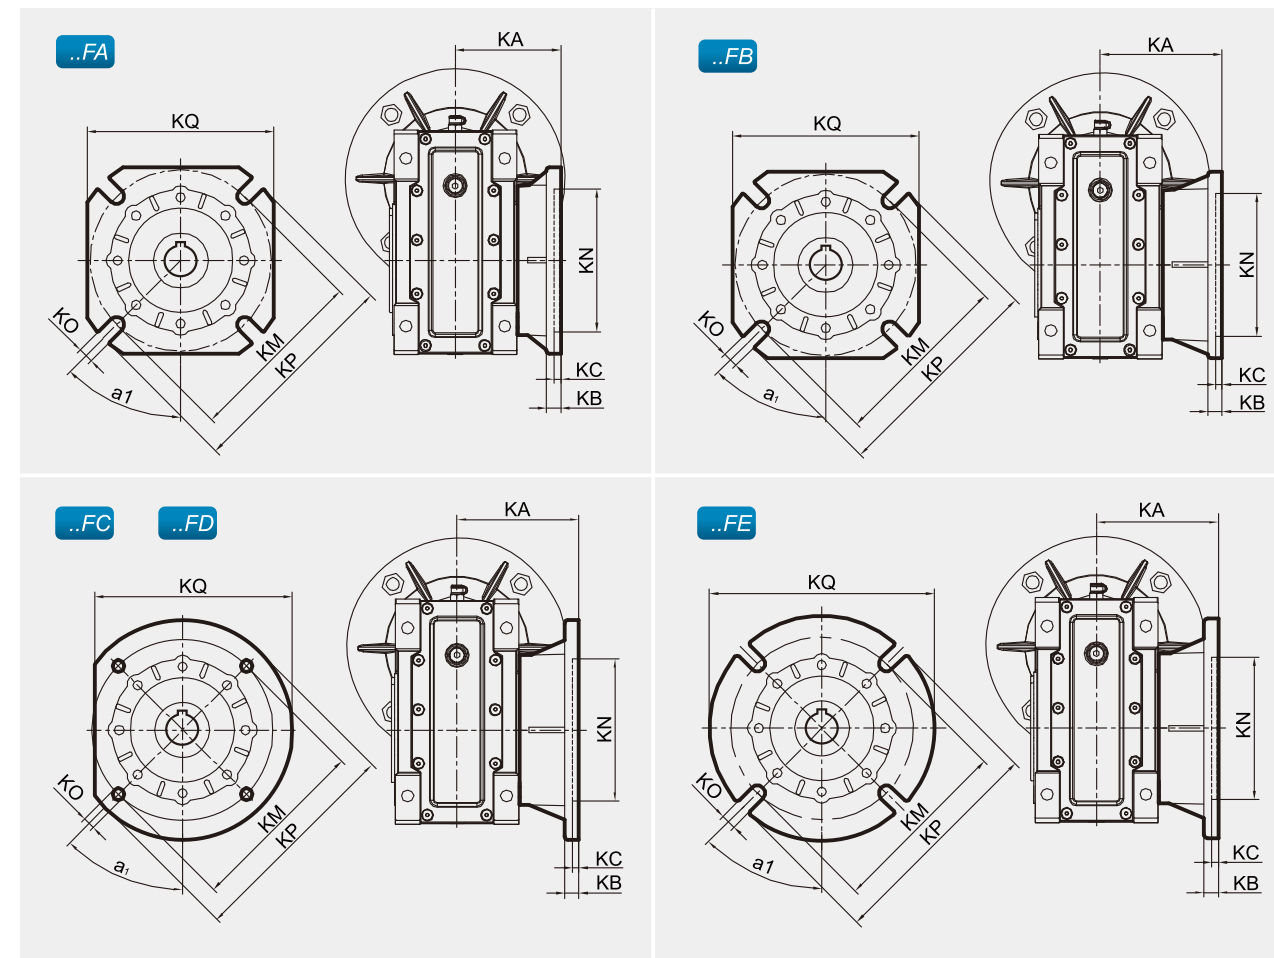OTS..F 输出法兰尺寸/Output Flange Dimension



OTS	FA								
	a1	KA	KB	KC	KM	KN _{H8}	KO	KP	KQ
050	45°	90	9	5	85	70	11(n=4)	125	110
063	45°	82	10	6	150	115	11(n=4)	180	142
075	45°	111	13	6	165	130	14(n=4)	200	170
090	45°	111	13	6	175	152	14(n=4)	210	200
110	45°	139	15	6	230	170	14(n=8)	280	260

OTS	FB								
	a1	KA	KB	KC	KM	KN _{H8}	KO	KP	KQ
050	45°	120	9	5	85	70	11(n=4)	125	110
063	45°	112	10	6	150	115	11(n=4)	180	142
075	45°	90	13	6	130	110	11(n=4)	160	-
090	45°	122	18	6	215	180	14(n=4)	250	-
110	-	-	-	-	-	-	-	-	-


OTS	FC								
	a1	KA	KB	KC	KM	KN _{H8}	KO	KP	KQ
050	45°	89	10	5	130	110	9(n=4)	160	-
063	45°	98	10	5	165	130	11(n=4)	200	-
090	45°	110	17	6	165	130	11(n=4)	200	-

OTS	FD								
	a1	KA	KB	KC	KM	KN _{H8}	KO	KP	KQ
050	45°	72	14.5	5	115	95	11(n=4)	140	-
063	45°	107	10	5	165	130	11(n=4)	200	-
090	45°	151	13	6	175	152	14(n=4)	210	-

OTS	FE								
	a1	KA	KB	KC	KM	KN _{H8}	KO	KP	KQ
050	-	-	-	-	-	-	-	-	-
063	45°	80.5	16.5	5	130	110	11(n=4)	160	-
090	-	-	-	-	-	-	-	-	-

OTS 连接尺寸图表 / CONNECTING DIMENSION SHEET

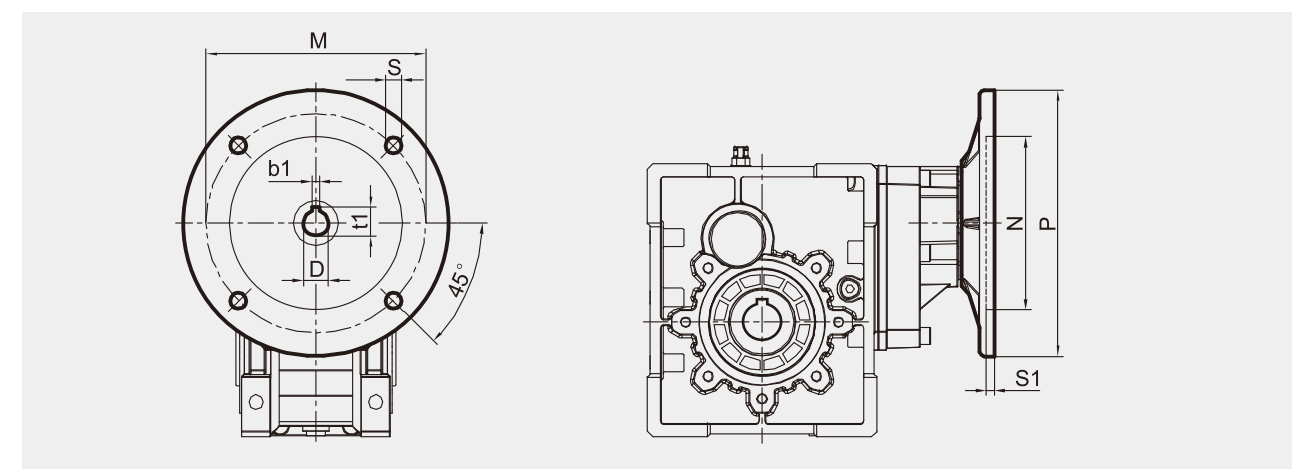
OTS..IEC 输入法兰尺寸/Input Flange Dimension



OTS	PAM-IEC	N(H8)		M		P		S		b1	t1	s1	i(速比/ratio)																							
		B5	B14	B5	B14	B5	B14	B5	B14				7.5	10	12.5	15	20	25	30	40	50	60	50	60	75	100	125	150	200	250	300					
D(F8)																																				
B												C																								
050	63B5	95	—	115	—	140	—	9	—	4	12.8	5	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11					
	71B5/B14	110	70	130	85	160	105	9	7	5	16.3	5	14	14	14	14	14	14	14	14	14	14	14	14	14	14	14	—	—	—	—					
	80B5/B14	130	80	165	100	200	120	11	7	6	21.8	5	19	19	19	19	19	19	19	19	19	19	19	19	19	19	—	—	—	—	—					
	90B5/B14	130	95	165	115	200	140	11	9	8	27.3	5	24	24	24	24	24	24	24	24	—	—	—	—	—	—	—	—	—	—	—	—				
063	63B5	95	—	115	—	140	—	9	—	4	12.8	5	—	—	—	—	—	11	11	11	11	11	11	11	11	11	11	11	11	11	11					
	71B5/B14	110	70	130	85	160	105	9	7	5	16.3	5	—	—	—	14	14	14	14	14	14	14	14	14	14	14	14	14	—	—	—	—				
	80B5/B14	130	80	165	100	200	120	11	7	6	21.8	5	19	19	19	19	19	19	19	19	19	19	19	19	19	19	19	—	—	—	—	—				
	90B5/B14	130	95	165	115	200	140	11	9	8	27.3	5	24	24	24	24	24	24	24	24	24	24	24	24	24	24	—	—	—	—	—	—				
075	63B5	95	—	115	—	140	—	9	—	4	12.8	5	—	—	—	—	—	—	—	—	—	—	11	11	11	11	11	11	11	11	11					
	71B5	110	—	130	—	160	—	9	7	5	16.3	5	—	—	—	—	—	—	14	14	14	14	14	14	14	14	14	14	14	14	14	14				
	80B5/B14	130	80	165	100	200	120	11	7	6	21.8	5	—	—	—	19	19	19	19	19	19	19	19	19	19	19	19	19	19	19	—	—				
	90B5/B14	130	95	165	115	200	140	11	9	8	27.3	5	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	—	—	—	—	—				
	100B5/B14	180	110	215	130	250	160	13	9	8	31.3	5.5	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28				
	112B5/B14	180	110	215	130	250	160	13	9	8	31.3	5.5	28	28	28	28	28	28	28	28	—	—	—	—	—	—	—	—	—	—	—	—				
090	63B5	95	—	115	—	140	—	9	—	4	12.8	5	—	—	—	—	—	—	—	—	—	11	11	11	11	11	11	11	11	11	11					
	71B5	110	—	130	—	160	—	9	7	5	16.3	5	—	—	—	—	—	—	—	14	14	14	14	14	14	14	14	14	14	14	14	14				
	80B5/B14	130	80	165	100	200	120	11	7	6	21.8	5	—	—	—	19	19	19	19	19	19	19	19	19	19	19	19	19	19	19	19	—				
	90B5/B14	130	95	165	115	200	140	11	9	8	27.3	5	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	—	—	—	—	—				
	100B5/B14	180	110	215	130	250	160	13	9	8	31.3	5.5	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28				
	112B5/B14	180	110	215	130	250	160	13	9	8	31.3	5.5	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28				
110	71B5	110	—	130	—	160	—	9	7	5	16.3	6	—	—	—	—	—	—	—	—	—	—	14	14	14	14	14	14	14	14	14	14				
	80B5	130	—	165	—	200	—	11	7	6	21.8	6	—	—	—	—	—	—	19	19	19	19	19	19	19	19	19	19	19	19	19	19				
	90B5	130	—	165	—	200	—	11	9	8	27.3	6	—	—	—	24	24	24	24	24	24	24	24	24	24	24	24	24	24	—	—	—				
	100B5/B14	180	110	215	130	250	160	13	9	8	31.3	6	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28				
	112B5/B14	180	110	215	130	250	160	13	9	8	31.3	6	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28				
	132B5	230	—	265	—	300	—	13	—	10	41.3	6	38	38	38	38	38	38	38	38	38	38	38	38	38	38	38	38	38	38	38	38				

OTS 连接尺寸图表 / CONNECTING DIMENSION SHEET

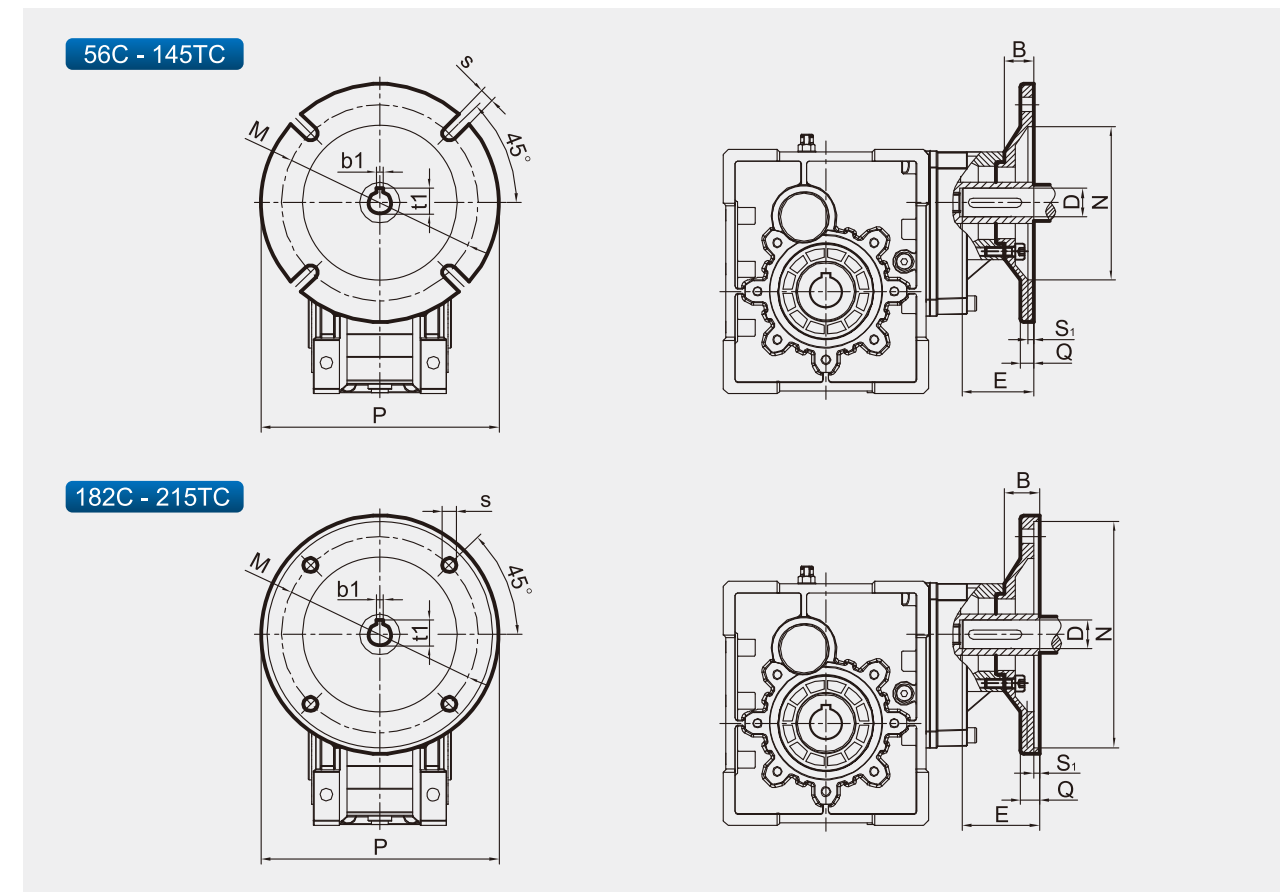
OTS ..NEMA输入法兰尺寸 / Input Flange Dimension



OTS	NEMA Flange	B	D	E	b1	t1	M	N	P	Q	S	S1
050	56C	1.15	0.625	2.06	0.188	0.713	5.875	4.5	6.5	0.433	0.413	0.177
063	56C	1.22	0.625	2.06	0.188	0.713	5.875	4.5	6.5	0.433	0.413	0.177
	143TC	1.22	0.875	2.12	0.188	0.963	5.875	4.5	6.5	0.433	0.413	0.177
	145TC	1.22	0.875	2.12	0.188	0.963	5.875	4.5	6.5	0.433	0.413	0.177
075 090	56C	1.50	0.625	2.06	0.188	0.713	5.875	4.5	6.5	0.433	0.413	0.177
	143TC	1.50	0.875	2.12	0.188	0.963	5.875	4.5	6.5	0.433	0.413	0.177
	145TC	1.50	0.875	2.12	0.188	0.963	5.875	4.5	6.5	0.433	0.413	0.177
	182TC	1.50	1.126	2.62	0.250	1.240	7.250	8.5	9.0	0.472	0.551	0.197
	184TC	1.50	1.126	2.62	0.250	1.240	7.250	8.5	9.0	0.472	0.551	0.197
110	56C	1.89	0.625	2.06	0.188	0.713	5.875	4.5	6.5	0.433	0.413	0.177
	143TC	1.89	0.875	2.12	0.188	0.983	5.875	4.5	6.5	0.433	0.413	0.177
	145TC	1.89	0.875	2.12	0.188	0.983	5.875	4.5	6.5	0.433	0.413	0.177
	182TC	1.89	1.125	2.62	0.250	1.240	7.250	8.5	9.0	0.472	0.551	0.197
	184TC	1.89	1.125	2.62	0.250	1.240	7.250	8.5	9.0	0.472	0.551	0.197
	213TC	1.89	1.375	3.12	0.312	1.517	7.250	8.5	9.0	0.472	0.551	0.197
	215TC	1.89	1.375	3.12	0.312	1.517	7.250	8.5	9.0	0.472	0.551	0.197

OTS 连接尺寸图表 / CONNECTING DIMENSION SHEET

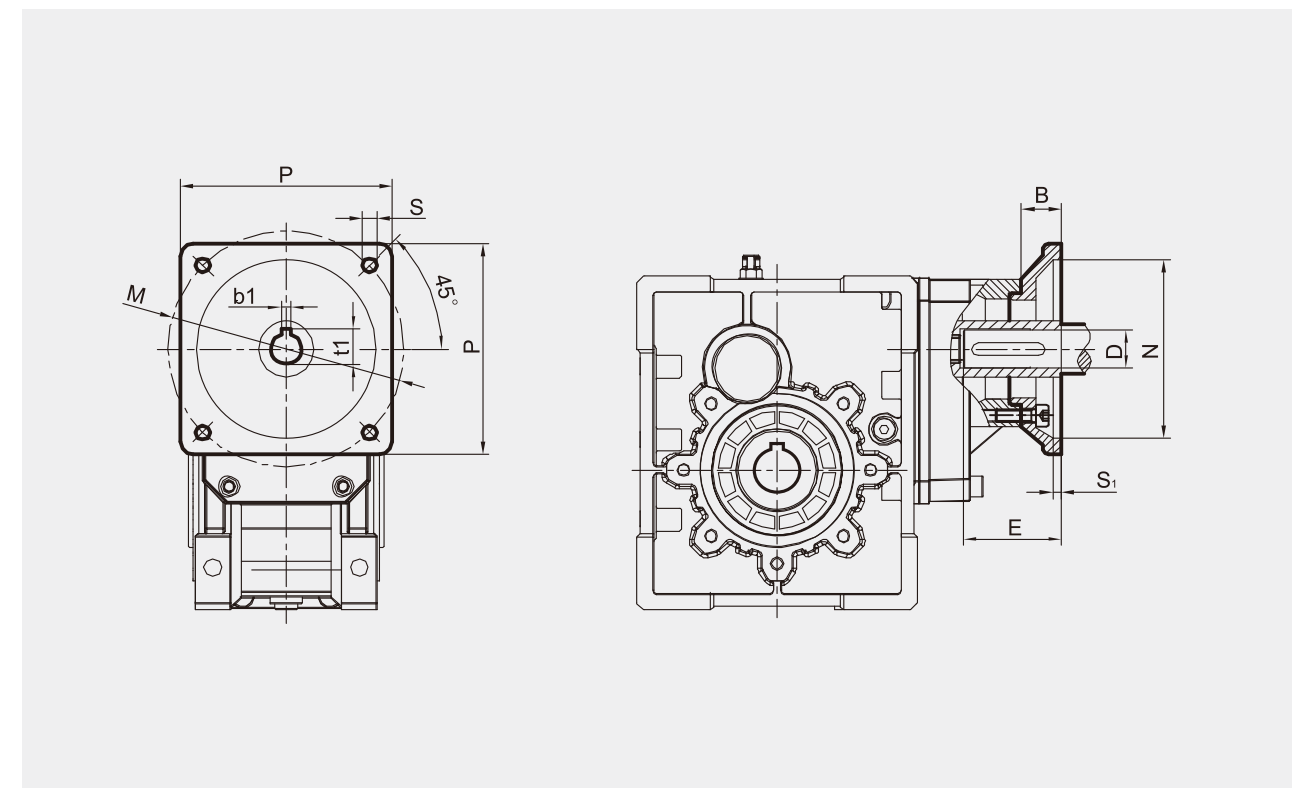
OTS ..ST伺服电机输入法兰尺寸 / Servo Motor Input Flange Dimension



OTS	P	B	D _{h7}	E	b1	t1	M	N	S	S1
050	60	35	14	30	5	16.3	70	50	5.5	4
	80	28	19	35	6	21.8	90	70	6	5
	90	30	16	35	5	18.3	100	80	6.5	5
	110	26	19	55	6	21.8	130	95	9	6
	130	32	22	57	6	24.8	145	110	9	6
063	60	40	14	30	5	16.3	70	50	5.5	4
	80	21	19	35	6	21.8	90	70	6	5
	90	21	16	35	5	18.3	100	80	6.5	5
	110	46	19	55	6	21.8	130	95	9	6
	130	40	22	57	6	24.8	145	110	9	6
075	110	47	19	55	6	21.8	130	95	9	6
	130	40	22	57	6	24.8	145	110	9	6
	150	38	28	58	8	31.3	165	130	11	6
090	110	47	19	55	6	21.8	130	95	9	6
	130	40	22	57	6	24.8	145	110	9	6
	150	38	28	58	8	31.3	165	130	11	6
110	130	38	22	57	6	24.8	145	110	9	6
	150	38	28	58	8	31.3	165	130	11	6
	180	38	35	65	10	38.3	200	114.3	13.5	6


附件尺寸图表 / ACCESSORIES OUTLINE DIMENSION SHEET

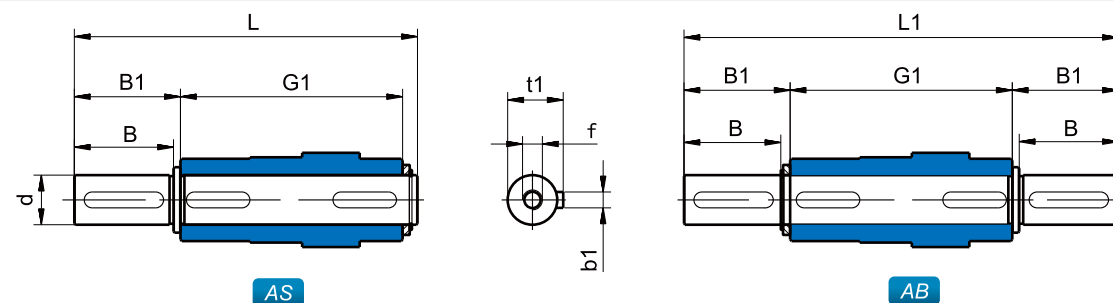输出轴 / Output Shafts




OTS	d _{h6}	B	B1	G1	L	L1	f	b1	t1
050	25	50	53.5	92	153	199	M10*27	8	28
063	25	50	53.5	112	173	219	M10*27	8	28
075	28	60	63.5	120	192	247	M10*27	8	31
090	35	80	84.5	140	234	309	M12*34	10	38
110	42	80	84.5	155	249	324	M16*42	12	45

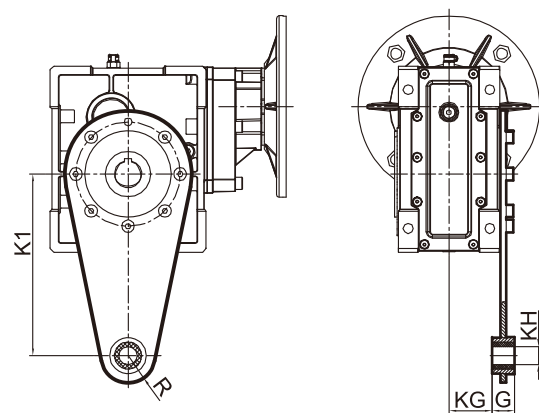扭力臂 / Torque Arm



OTS	K1	G	KG	KH	R
050	100	14	38.5	10	18
063	150	14	49	10	18
075	200	25	47.5	20	30
090	200	25	57.5	20	30
110	250	30	62	25	35

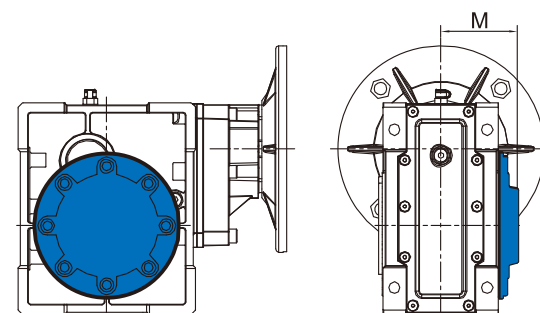
防尘盖/Cover



OTS	M
050	58
063	69
075	74
090	86
110	94

安装方位图 / INSTALLATION POSITIONS DIAGRAM

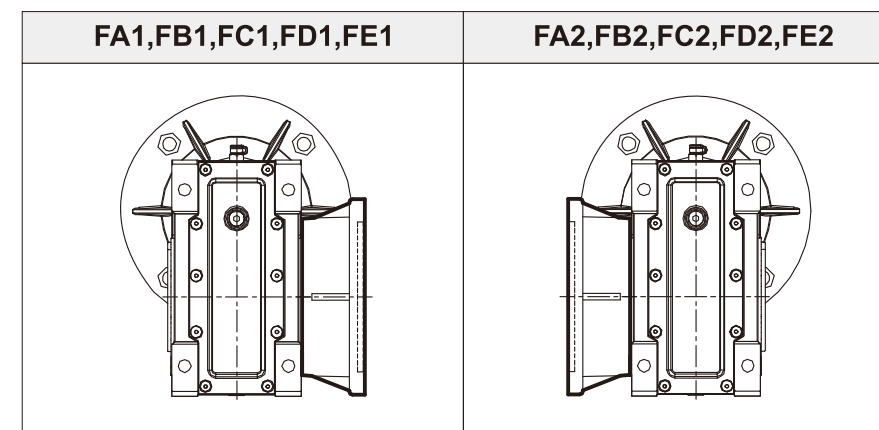
输出法兰位置 / Position diagram for output flange



如果没有特殊要求，一般按出厂标准位置如图F..1方式和B3位置提供。

Unless specified otherwise, the gear units is supplied with the flange in pos. **F..1** referred to position **B3**.

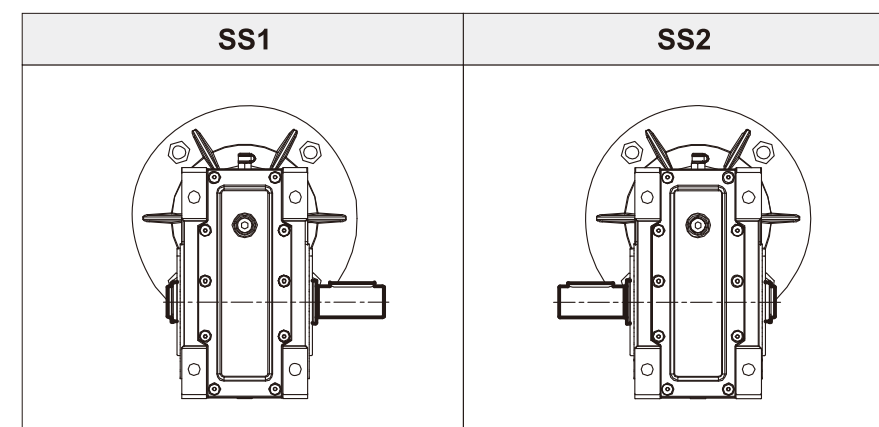
单向输出轴位置 / Position diagram for single output shaft



如果没有特殊要求，一般按出厂标准位置如图SS1方式和B3位置提供。

Unless specified otherwise, the gear units is supplied with the flange in pos. **SS1** referred to position **B3**.

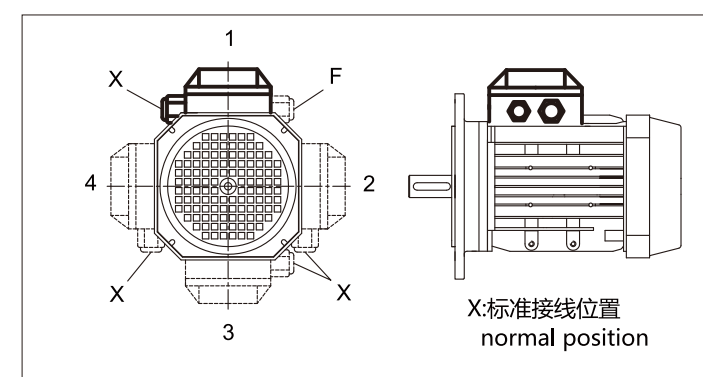电机接线盒方位/Position of motor terminal box




符号释意 / Symbols Used

符号/Symbol	含义/Meaning
	排气阀 Breather valve
	油位塞 Oil level plug
	放油塞 Oil drain plug

安装方位图 / INSTALLATION POSITIONS DIAGRAM

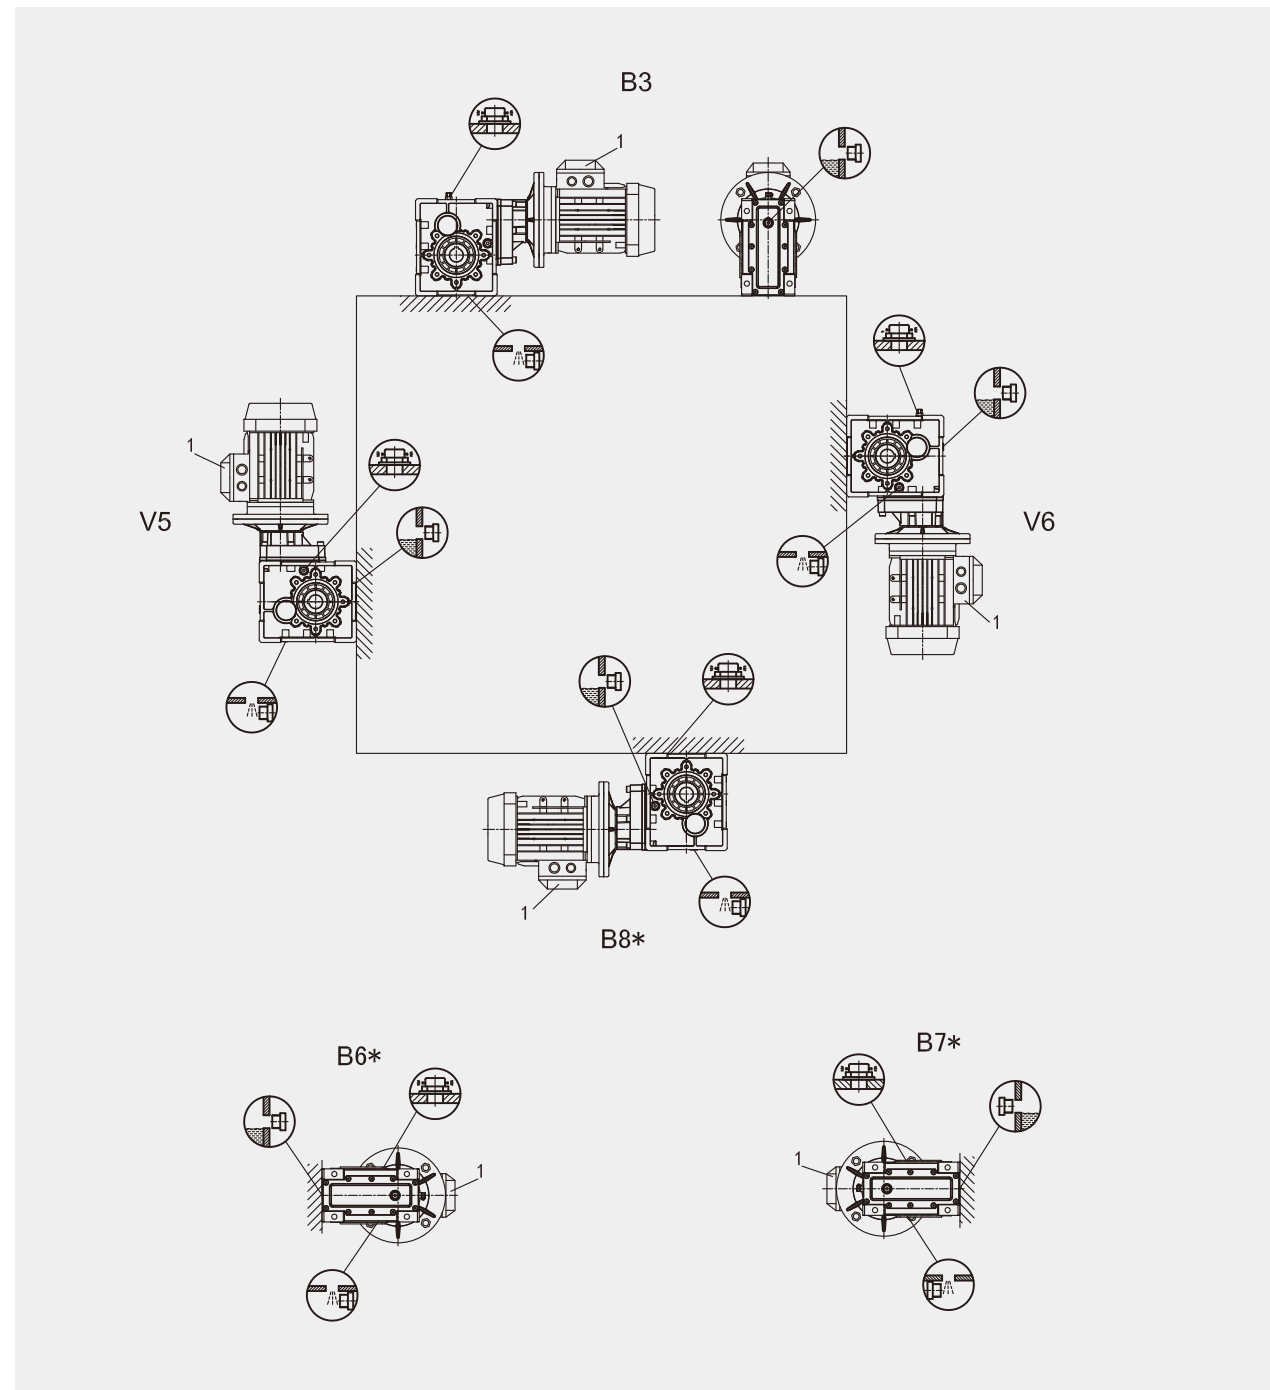OTS..安装方位 / Mounting Positions




* 表示在此安装方式，不能仅凭油位塞加注润滑油，油位需高出油位塞，加注量按表内所示。

It means the lubricant can't be added according to the oil level line plug, but also higher the plug to fill quantity as shown in the table.

安装方位图 / INSTALLATION POSITIONS DIAGRAM

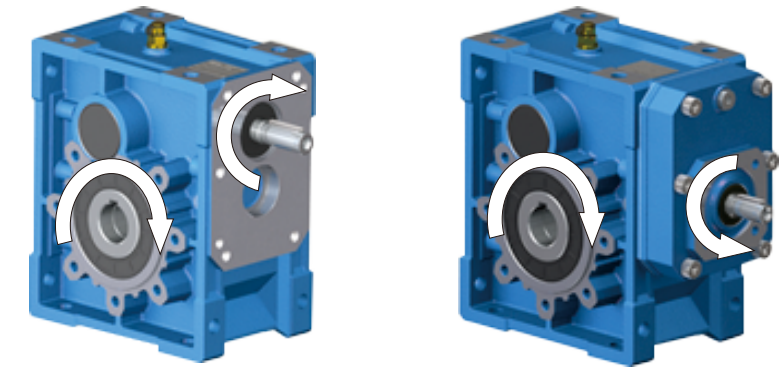旋转方向 / Direction of rotation



减速机在使用时，电机可正反转输入使用，推荐使用上图所示输入轴旋转方向为准双曲面齿轮最佳啮合方向。

The motor can be run either CW or CCW while using with gearbox, the above chart is recommended.